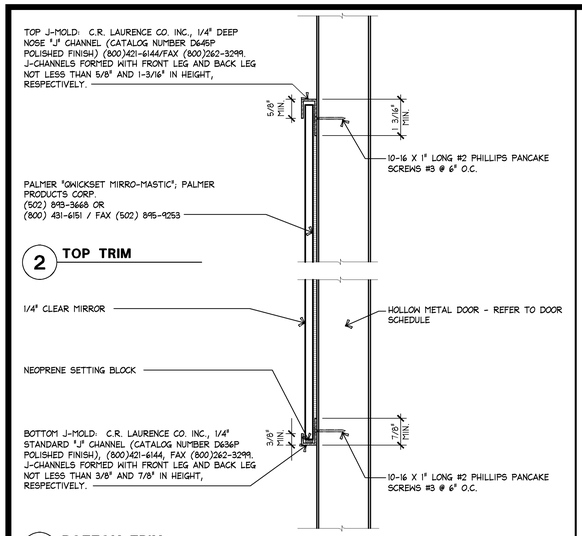

MIRROR INSTALLATION INSTRUCTIONS.

1. INSTALL METAL BLOCKING TO METAL STUD FRAMING - REFER TO IN-WALL BLOCKING DETAILS
2. INSTALL G.W.B. OVER ROUGH FRAMING.
3. INSTALL TOP & BOTTOM "J" CHANNEL W/ #6GA X 1 5/8" LONG BUGLE HEAD SCREWS @ 6" O.C. - NO EXCEPTIONS.
4. INSTALL NEOPRENE SETTING BLOCK IN BOTTOM J-CHANNEL.
5. INSTALL 1/4" MIRROR GLASS WITH MASTIC.

NOTE:
ANY MIRROR INSTALLATION WHERE EITHER THE TOP AND/OR BOTTOM J-CHANNEL IS NOT MECHANICALLY FASTENED WILL NOT BE ACCEPTED.



1 WALL



2 DOOR

MIRROR INSTALLATION INSTRUCTIONS.

1. INSTALL METAL BLOCKING TO METAL STUD FRAMING - REFER TO IN-WALL BLOCKING DETAILS
2. INSTALL G.W.B. OVER ROUGH FRAMING.
3. CONTRACTOR WILL MASTIC MIRROR TO PLYWOOD, FOLLOW INSTRUCTIONS ON SHEET A15.2 & A15.3.
4. CONTRACTOR WILL SECURE "J" CLIPS & NEOPRENE SETTING BLOCK TO PERIMETER OF MIRROR & PLYWOOD TO CAPTURE MIRROR.
5. INSTALL CLEATS ON PLYWOOD & WALL AND ATTACH MIRROR TO WALL AND INSTALL LOCKDOWN PLATE.

NOTE:
ANY MIRROR INSTALLATION WHERE EITHER THE TOP AND/OR BOTTOM C-CHANNEL IS NOT MECHANICALLY FASTENED WILL NOT BE ACCEPTED.



1 WALL



1 INSIDE CORNER



2 TRIM DETAIL

NOTE: SECURE J-CHANNELS TO SOLID BLOCKING WITH 1/4" DIA TEK SCREWS @ 12" O.C. SEE M/A12.5 FOR BLOCKING

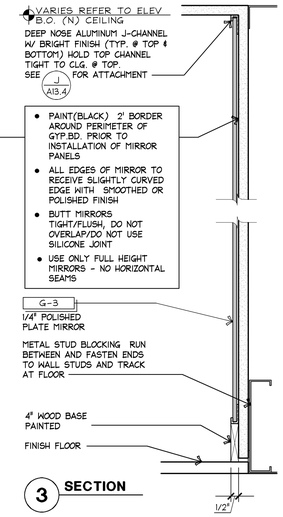

3 SECTION

MOUNTING DETAIL AT DOOR — 6"-1'-0" — 02DA134MOMNTG — M

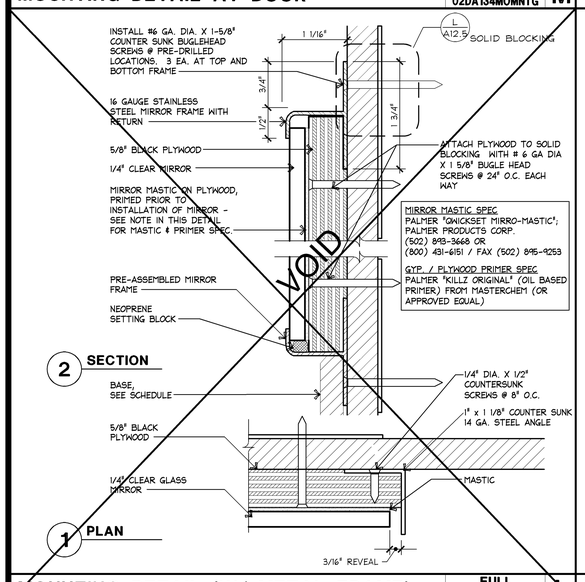

MOUNTING DETAIL (W/ METAL FRAME) — FULL — 02DA134L0MNTG — L

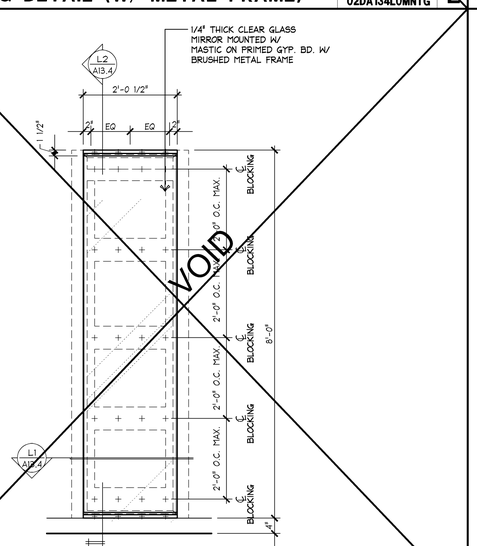

MIRROR ELEVATIONS (W/ MTL FRAME) — 3/4"=1'-0" — 02EA134K0MIRR — K

ASSEMBLY DETAILS — N.T.S. — 02DA134J0MNTG — J

TOP J-MOLD: C.R. LAURENCE CO. INC., 1/4" DEEP NOSE "J" CHANNEL (CATALOG NUMBER D645P POLISHED FINISH) (800)421-6144/FAX (800)262-3299. J-CHANNELS FORMED WITH FRONT LEG AND BACK LEG NOT LESS THAN 5/8" AND 1-3/16" IN HEIGHT, RESPECTIVELY.

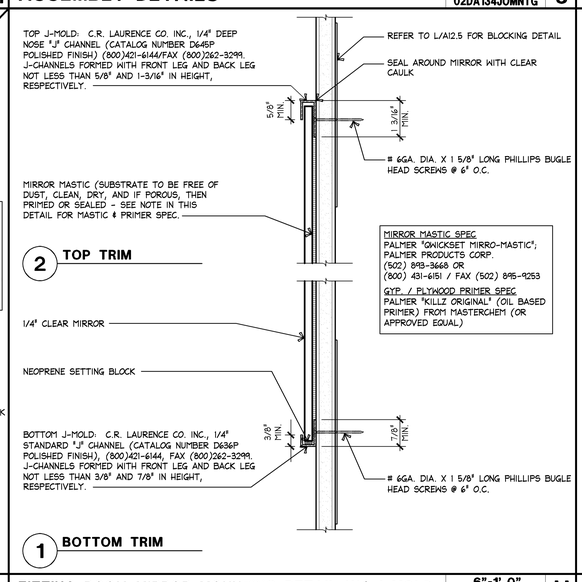

FITTING ROOM MIRROR MOUNTING DETAIL W/ J MOLD — 6"=1'-0" — 02DA134H0MNTG — H

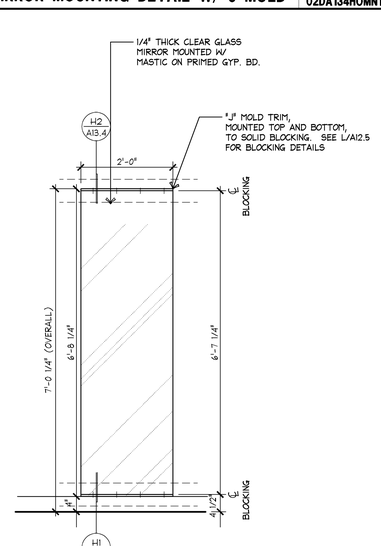

FITTING ROOM MIRROR ELEVATIONS (W/ J MOLD) — 3/4"=1'-0" — 02EA134G0MIRR — G

ASSEMBLY DETAILS — N.T.S. — 02DA134F1MNTG — F

ASSEMBLY & INSTALLATION INSTRUCTIONS

1. CONTRACTOR WILL MASTIC MIRROR TO PLYWOOD, FOLLOW INSTRUCTIONS ON SHEET A15.2 & A15.3.
2. CONTRACTOR WILL SECURE "J" CLIPS TO PERIMETER OF MIRROR & PLYWOOD TO CAPTURE MIRROR.
3. CONTRACTOR WILL INSTALL CLEATS ON PLYWOOD & WALL AND ATTACH MIRROR TO WALL AND INSTALL LOCKDOWN PLATE.

TOP J-MOLD: PROVIDED BY OWNER AND INSTALLED BY G.C. J-CHANNELS FORMED WITH FRONT LEG NOT LESS THAN 1/2" OR EQUAL.

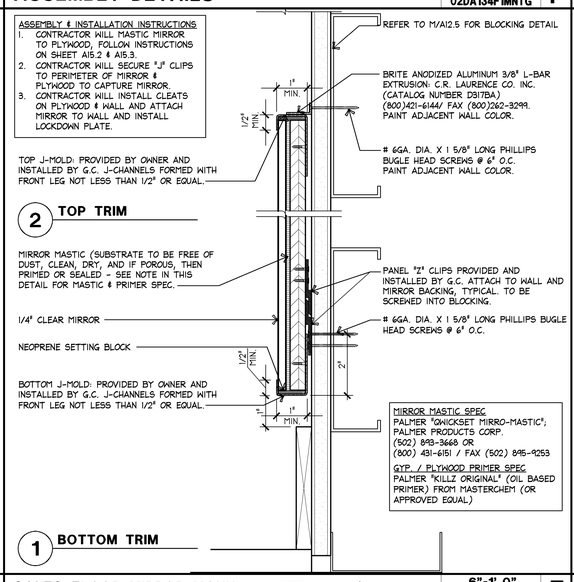

SALES FLOOR MIRROR MOUNTING DETAIL W/ J MOLD — 6"=1'-0" — 02DA134E1MNTG — E

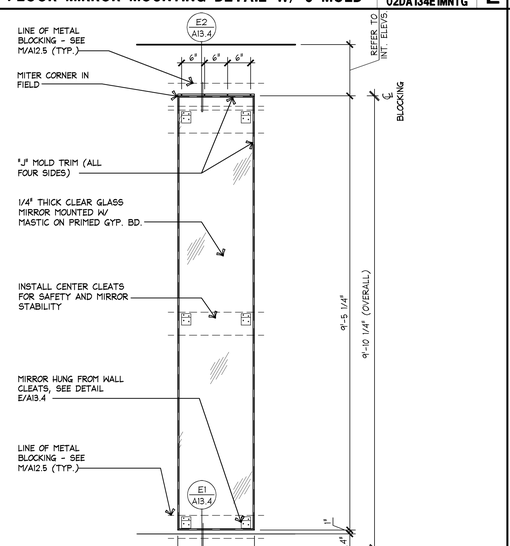

SALES FLOOR MIRROR ELEVATIONS (W/ J MOLD) — 3/4"=1'-0" — 02EA134D1MIRR — D

3-WAY MIRROR DETAILS — 3"=1'-0" — - — C

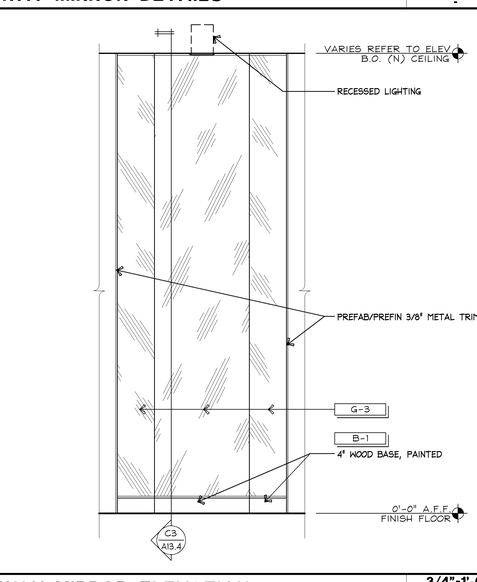

3-WAY MIRROR ELEVATION — 3/4"=1'-0" — - — B

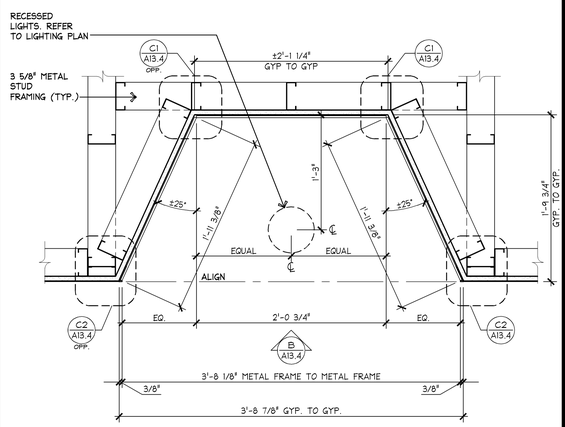

G.C. NOTE:
DIMENSIONS FROM GYP. TO GYP. (U.N.O.)

3-WAY MIRROR PLAN — 1 1/2"=1'-0" — - — A

PROPRIETARY RIGHTS: THESE SPECIFICATIONS WERE PREPARED FOR USE ON A SPECIFIC SITE. EXCEPT AS EXPRESSLY AUTHORIZED BY EXPRESS STORE PLANNING, INC., THEY ARE NOT INTENDED FOR USE ON ANY OTHER PROJECT. THEY ARE NOT TO BE LOANED, COPIED OR DISCLOSED TO ANY UNAUTHORIZED PERSON OR ENTITY WITHOUT THE PRIOR EXPRESS WRITTEN CONSENT OF EXPRESS STORE PLANNING, INC., AND NO RIGHT IS EXPRESSLY AUTHORIZED IN WRITING BY EXPRESS STORE PLANNING, INC., BY A SUPPLIED STORE DESIGN AND CONSTRUCTION ("SDC").

COPYRIGHT NOTICE: THESE SPECIFICATIONS ARE THE PROPERTY OF EDSC AND SHALL NOT BE REPRODUCED IN ANY MANNER OR USED ON ANY OTHER PROJECT EXCEPT BY WRITTEN AGREEMENT WITH EDSC. NO AUTHORIZATION OF THE EDSC. ALL OMISSION OR UNAUTHORIZED USE OF THESE DRAWINGS AND SPECIFICATIONS SHALL CONSTITUTE INFRINGEMENT OF COPYRIGHT. EDSC SHALL HAVE PROPERTY RIGHTS IN ALL MODIFICATIONS AND ADDITIONS TO THESE DRAWINGS AND SPECIFICATIONS PREPARED BY