ELECTRICAL LOAD SUMMARY

DESCRIPTION	ACTUAL CONNECTED (kW/kVA)	POWER FACTOR	ACTUAL DEMAND (kVA)	NEC CONNECTED (kW/kVA)	NEC DEMAND FACTOR		NEC DEMAND (kVA)
LIGHTING	17.972	1.0	17.972	17.972	1.25		22.465
TRACK LIGHTING	8.277	1.0	8.277	8.277	98 A	120V*****	11.760
SHOW WINDOW	0.000	1.0	0.000	0.000	20 FT	200VA/FT **	4.000
RECEPTACLES	19.760	1.0	19.760	19.760	1.0< 10kw 0.5 REMAINING		14.880
MOTORS	0.300	1.0	0.300	0.300	1.25		0.375
AIR CONDITIONING *	97.477	1.0	97.477	97.477	1.0 ****		97.477
ELECTRIC HEATING *	0.000	1.0	0.000	0.000	1.0		0.000
WATER HEATER	3.000	1.0	3.000	3.000	1.0		3.000
MISCELLANEOUS	28.700	1.0	28.700	28.700	1.0		28.700
TOTAL	175.486		175.486	175.486			182.657

NOTES:

*USE GREATER LOAD OF THE TWO CATAGORIES

**NEC ARTICLE 220-43 REQUIREMENT (200VA PER FOOT OR ACTUAL CONNECTED)

***NEC ARTICLE 220-43 REQUIREMENT (150VA/2FT OR ACTUAL CONNECTED)

****125% OF THE LARGEST MOTOR OR COMPRESSOR IN SYSTEM

*****NEC ARTICLE 220-43 REQUIREMENT 2011 EXCEPTION (CURRENT LIMITERS)

NEC DEMAND kW *1000 = MINIMUM FEEDER AMPERAGE

SYSTEM VOLTAGE * 1.732

182.657 *1000 / 480 *1.732 = **220 A** **EXISTING 400A SERVICE**

TRANSFORMER LOAD SUMMARY

DESCRIPTION	ACTUAL CONNECTED (kW/kVA)	POWER FACTOR	ACTUAL DEMAND (kVA)	NEC CONNECTED (kW/kVA)	NEC DEMAND FACTOR		NEC DEMAND (kVA)
LIGHTING	17.972	1.0	17.972	17.972	1.25		22.465
TRACK LIGHTING	8.277	1.0	8.277	8.277	98 A	120V*****	11.760
SHOW WINDOW	0.000	1.0	0.000	0.000	20 FT	200VA/FT **	4.000
RECEPTACLES	19.760	1.0	19.760	19.760	1.0< 10kw 0.5 REMAINING		14.880
MOTORS	0.300	1.0	0.300	0.300	1.25		0.375
AIR CONDITIONING	0.000	1.0	0.000	0.000	1.0		0.000
WATER HEATER	3.000	1.0	3.000	3.000	1.0		3.000
MISCELLANEOUS	28.700	1.0	28.700	28.700	1.0		28.700
TOTAL	78.009		78.009	78.009			85.180

USE 112.5 KVA 480-120/208V, 3 PHASE TRANSFORMER

CURRENT LIMITING BREAKERS

CIRCUIT NUMBER	BREAKER SIZE	CIRCUIT NUMBER	BREAKER SIZE
A-8	15A	A-18	10A
A-10	13A	A-20	10A
A-12	13A	A-22	10A
A-14	13A	A-24	6A
A-16	13A		

NOTE: PROVIDE EATON PRC LIMITER PANEL WITH BREAKERS SHOWN. ROUTE CIRCUITS THROUGH CURRENT LIMITING BREAKER PRIOR TO LANDING ON BRANCH CIRCUIT BREAKER.

PANELBOARD A

LOCATION: WR ENCLOSURE (IFS)

VOLTAGE 120/208V., 3PH, 4W
MOUNTING SURFACE
BUS RATING 225A

150A MCB
A.I.C.: 65,000A

LCL	LTG ZONE	CCT NO.	LOAD DESCRIPTION	CB AMP	CB POLE	LOAD A	LOAD B	LOAD C	CB AMP	CB POLE	LOAD DESCRIPTION	CCT NO.	LTG ZONE	LCL
L.O.	X	1	SALES EM/NL LTS	20	1	892			20	1	NON-SALES LTS	2	B	X
							934							
L.O.	X	3	SALES EM/NL LTS	20	1		1,413		20	1	FITTING ROOM LTS	4	C	X
								792						
L.O.	X	5	NON-SALES EM/NL LTS	20	1			1,366	20	1	FITTING ROOM LTS	6	D	X
								301						
	X	A	7 STOREFRONT LTS	20	1	536			20	1	SALES AREA TK LTG	8	D	X
						1,260								
	X	A1	9 SIGN	20	1		1,200		20	1	SALES AREA TK LTG	10	C	X
							1,092							
	X	A1	11 SIGN	20	1			1,200	20	1	SALES AREA TK LTG	12	D	X
								1,050						
	X	D	13 SALES PERIMETER LT	20	1	1,508			20	1	SALES AREA TK LTG	14	C	X
						1,050								
	X	D	15 SALES PERIMETER LT	20	1		896		20	1	SALES AREA TK LTG	16	D	X
							1,176							
	X	C	17 SALES PERIMETER LT	20	1			1,058	20	1	SALES AREA TK LTG	18	C	X
								837						
	X	D	19 TRANSITION LTS	20	1	360			20	1	SALES AREA TK LTG	20	D	X
						864								
		21	SPARE	20	1		0		20	1	SALES AREA TK LTG	22	D	X
							948							
		23	TASK LTG	20	1			540	20	1	GONDOLA LTS	24	C	X
								420						
	X	D	25 BEAUTY CABINET RCPTS	20	1	900			20	1	SPARE	26		
						0								
	X	D	27 BEAUTY CABINET RCPTS	20	1		720		20	1	STOREFRONT RCPTS	28	A	X
							1,080							
	X	A	29 PORTAL LT BOXES	20	1			540	20	1	PINK SIGNS	30	D	X
								904						
L.O.	X	31	SALES EM/NL LTS	20	1	888			20	1	SPARE	32		
						0								
	X	C	33 FLOORBOX RCPTS	20	1		924		20	1	SPARE	34		
							0							
	X	C	35 FLOORBOX RCPTS	20	1			1,032	20	1	SPARE	36		
								0						
		37	SPARE	20	1	0			20	1	SPARE	38		
						0								
	X	39	CASHWRAP LTS	20	1		142		20	1	SPARE	40		
							0							
	X	41	CASHWRAP LTS	20	1			126	20	1	SPARE	42		
								0						
			LOAD/PH:			9,192	10,383	9,374						
			LCL @ 25% PER PHASE			0	0	0						
			TOTAL LOAD/PH:			9,192	10,383	9,374						

TOTAL VA: 28,949 VA
TOTAL AMPS: 80 A

NOTES:
ALL CIRCUITS BREAKERS TO BE 20 AMP, 1-POLE UNLESS OTHERWISE NOTED.
(ALL PHASES SHALL BE BALANCED WITH 7% USING ACTUAL LOAD TOTALS)

BREAKER OPTIONS:
BABR - SOLENOID OPERATED BABR
LO - HANDLE LOCK-OFF DEVICE
ST - SHUNT TRIP
AUX - AUXILIARY CONTACTS
PA - HANDLE PADLOCK ATTACHMENT
GFCI - GROUND FAULT INTERRUPT
HACR - HEATING, A/C & REFRIGERATION
LCL - CONTINUOUS LOAD

PANELBOARD B

LOCATION: WR ENCLOSURE (IFS)

VOLTAGE 120/208V., 3PH, 4W
MOUNTING SURFACE
BUS RATING 225A

150A M.C.B.
A.I.C.: 65,000A

LCL	LTG ZONE	CCT NO.	LOAD DESCRIPTION	CB AMP	CB POLE	LOAD A	LOAD B	LOAD C	CB AMP	CB POLE	LOAD DESCRIPTION	CCT NO.	LTG ZONE	LCL
		1	SPARE	20	1	0			20	1	HAND DRYER	2		
						1,800								
		3	MICROWAVE	20	1		1,200		20	1	SENSORMATIC	4		
							1,080							
		5	NON-SALES RCPTS	20	1			1,080	20	1	TRANSITION RCPTS	6		
								1,080						
		7	CSHWRP CLOSET RCS	20	1	720			20	1	TRANSITION RCPTS	8		
						720								
L.O.		9	(WR) TEMP CONTROLS	20	1		500		20	1	(WR) TELEPHONE BRD	10		L.O.
							180							
		11	REFRIGERATOR	20	1			1,200	20	1	HAND DRYER	12		
								1,800						
		13	MANAGER'S RCPTS	20	1	1,440			20	2	WATER HEATER	14		
						1,500								
		15	SPARE	20	1		0					16		
							1,500							
		17	SPARE	20	1			0	20	1	SPARE	18		
		19	NON-SALES RCPTS	20	1	1,440			20	1	SPARE	20		
						0								
L.O.		21	MONITORING CKT BD	20	1		500		20	1	ROLLING GRILLE	22		
							1,600							
		23	DREAMSTEAMER	50	3			4,500	20	1	ROLLING GRILLE	24		
								1,600						
		25				4,500			20	1	HVAC RCPTS	26		
						720								
		27					4,500		20	1	VIDEO WALL	28		
							720							
		29	SPARE	20	1			0	20	1	VIDEO WALL	30		
								720						
		31	SPARE	20	1	0			20	1	SPARE	32		
						0								
		33	SPARE	20	1		0		20	1	SPARE	34		
							0							
		35	SPARE	20	1			0	20	1	SPARE	36		
								0						
		37	SPARE	20	1	0			20	1	SPARE	38		
						0								
		39	SPARE	20	1		0		20	1	SPARE	40		
							0							
		41	SPARE	20	1			0	20	1	SPARE	42		
								0						
			LOAD/PH:			12,840	11,780	11,960						
			LCL @ 25% PER PHASE			0	0	0						
			TOTAL LOAD/PH:			12,840	11,780	11,960						

TOTAL VA: 36,600 VA
TOTAL AMPS: 102 A

NOTES:
ALL CIRCUITS BREAKERS TO BE 20 AMP, 1-POLE UNLESS OTHERWISE NOTED.
(ALL PHASES SHALL BE BALANCED WITH 7% USING ACTUAL LOAD TOTALS)

BREAKER OPTIONS:
BABR - SOLENOID OPERATED BABR
LO - HANDLE LOCK-OFF DEVICE
ST - SHUNT TRIP
AUX - AUXILIARY CONTACTS
PA - HANDLE PADLOCK ATTACHMENT
GFCI - GROUND FAULT INTERRUPT
HACR - HEATING, A/C & REFRIGERATION
LCL - CONTINUOUS LOAD

PANELBOARD C

LOCATION: WR ENCLOSURE (IFS)
ISOLATED GROUND BUS

VOLTAGE 120/208V., 3PH, 4W
MOUNTING SURFACE
BUS RATING 100A

100A M.C.B
A.I.C.: 65,000A

LCL	LTG ZONE	CCT NO.	LOAD DESCRIPTION	CB AMP	CB POLE	LOAD A	LOAD B	LOAD C	CB AMP	CB POLE	LOAD DESCRIPTION	CCT NO.	LTG ZONE	LCL
L.O.		1	SECURITY EQUIP.	20	1	900			20	1	HANDSTEAMER RCPT	2		
						360								
L.O.		3	FACP	20	1		500		20	1	HANDSTEAMER RCPT	4		
							360							
		5	MPOS STATION	20	1			360	20	1	HANDSTEAMER RCPT	6		
								360						
		7	SPARE	20	1	300			20	1	HANDSTEAMER RCPT	8		
						360								
L.O.		9	DM MANAGER'S I.G.	20	1		360		20	1	PROCESSING HANDST.	10		L.O.
							360							
L.O.		11	MANAGER'S I.G.	20	1			360	20	1	CASHWRAP I.G.	12		
								1,260						
L.O.		13	MANAGER'S I.G.	20	1	360			20	1	CASHWRAP RCPTS	14		
						1,260								
L.O.		15	MANAGER'S I.G.	20	1		360		20	1	SPARE	16		
							0							
L.O.		17	BACKWRAP I.G.	20	1			360	20	1	SPARE	18		
								0						
L.O.		19	A.L.L. I.G.	20	1	180			20	1	I.P. CAMERA SYSTEM	20		L.O.
						500								
		21	MUSIC/SOUND SYSTEM	20	1		800		20	1	PAGING SYSTEM	22		L.O.
							360							
		23	BACKWRAP RECPT	20	1			720	20	1	HANDSTEAMER RCPT	24		
								360						
		25	SPARE	20	1	0			20	1	HANDSTEAMER RCPT	26		
						360								
		27	SPARE	20	1		0		20	1	I.P. CAMERA POWER	28		L.O.
							500							
		29	SPARE	20	1			0	20	1	I.P. CAMERA POWER	30		L.O.
								500						
		31	SPARE	20	1	0			20	1	SPARE	32		
						0								
		33	SPARE	20	1		0		20	1	SPARE	34		
							0							
		35	SPACE ONLY	20	1			0	20	1	SPACE ONLY	36		
								0						
		37	SPACE ONLY	20	1	0			20	1	SPACE ONLY	38		
						0								
		39	SPACE ONLY	20	1		0		20	1	SPACE ONLY	40		
							0							
		41	SPACE ONLY	20	1			0	20	1	SPACE ONLY	42		
								0						
			LOAD/PH: (NEC CONNECTED)			4,580	3,600	4,280						
			LCL @ 25% PER PHASE			0	0	0						
			TOTAL LOAD/PH: (NEC DEMAND)			4,580	3,600	4,280						

TOTAL VA: 12,460 VA
TOTAL AMPS: 35 A

NOTES:
ALL CIRCUITS BREAKERS TO BE 20 AMP, 1-POLE UNLESS OTHERWISE NOTED.

ACTUAL LOAD **A** 4,580 kW **B** 3,600 kW **C** 4,280 kW **TOTAL** 12,460 kW

NEC CONNECTED TOTALS **A** 4,580 kW **B** 3,600 kW **C** 4,280 kW **TOTAL** 12,460 kW

(ALL PHASES SHALL BE BALANCED WITH 7% USING ACTUAL LOAD TOTALS)

BREAKER OPTIONS:
BABR - SOLENOID OPERATED BABR
LO - HANDLE LOCK-OFF DEVICE
ST - SHUNT TRIP
AUX - AUXILIARY CONTACTS
PA - HANDLE PADLOCK ATTACHMENT
GFCI - GROUND FAULT INTERRUPT
HACR - HEATING, A/C & REFRIGERATION
LCL - CONTINUOUS LOAD

LIGHTING TIME CONTROL LEGEND:

A1 – EXTERIOR SIGNAGE BLADE SIGN INTERNALLY ILLUMINATED TRANSOMS STOREFRONT DOWNLIGHTING

A – MARKETING LEVEL LIGHTING SHOW WINDOW LIGHTS SHOW WINDOW RECEPTACLES

B – STOCKING STOCKROOM (NON-SALES) LIGHTING

C – TASK LEVEL 1/2 SALES FLOOR LIGHTING EVENLY DISTRIBUTED (BBW, PINK & BEN) – INCLUDING CABINET LIGHTING GENERAL SALES FLOOR RECEPTACLES DISPLAY CABINET LIGHTING RECEPTACLES

D – SALES LEVEL LIGHTING BALANCE OF SALES FLOOR LIGHTING INTERIOR DISPLAY LIGHTING (CHANDELIERS, NEON, ETC)

NOTE:
ALL LIGHTING CIRCUITS CONNECTED TO LIGHTING ZONES ARE CONNECTED AND CONTROLLED AUTOMATICALLY THROUGH THE H.V.A.C BUILDING CONTROL TIME CLOCK. REFER TO ELECTRICAL POWER GENERAL NOTE #13 ON THIS SHEET.

ELECTRICAL EQUIPMENT DATA

SYM.	ITEM	VOLTAGE	HP.	KW.	F.L.A.	FEEDERS WIRE	FEEDERS COND.	TYPE OF CONN.	BRANCH BREAKER	DISC. SW.	BUS/ FUSES	REMARKS
①	WATER HEATER	208V, 1#	--	3.0	--	2#12 THHN 1#12 G	1/2"	"AC" TOGGLE SWITCH	20A-2P	---	---	SEE NOTE NO. 1 BELOW
②	FPVAV-1 (WITH HEATING)	277/480V, 3#	--	6.00 ELEC. HEAT	13.8	4#12 THHN 1#12 G	1/2"	THRU UNIT DISC. SW.	15A-3P	---	---	SEE NOTE NO. 2 BELOW
③	RTU-1	480V, 3#	10	30.00 ELEC. HEAT	78.0	3#3 THHN 1#8 G	1 1/2"	THRU UNIT DISC. SW.	90A-3P	---	---	SEE NOTE NO. 2 BELOW
④	VAV-1	480V, 3#	--	5.00 ELEC. HEAT	7.5	3#12 THHN 1#12 G	1/2"	THRU UNIT DISC. SW.	15A-3P	---	---	SEE NOTE NO. 2 BELOW
⑤	VAV-2	480V, 3#	--	12.00 ELEC. HEAT	18.0	3#12 THHN 1#12 G	1/2"	THRU UNIT DISC. SW.	20A-3P	---	---	SEE NOTE NO. 2 BELOW
⑥	DREAM STEAMER	208V, 3#	--	13.500	--	3#8 THHN 1#10 G	1"	THRU RECEPTACLE	40A-3P	---	---	---

NOTE:
1. "AC" TOGGLE SWITCH TO BE FURNISHED BY LSD&C AND INSTALLED BY ELECTRICAL CONTRACTOR.
2. DISCONNECT SWITCH TO BE FURNISHED AND INSTALLED BY MECHANICAL SUPPLIER.

ELECTRICAL POWER GENERAL NOTES

1. HVAC CIRCUIT BREAKERS SHALL BE "HACR" TYPE WHEN REQUIRED BY EQUIPMENT NAMEPLATE PER N.E.C.
2. ELECTRICAL CONTRACTOR SHALL FIELD VERIFY EXACT K.A.I.C. RATING (BUILDING SERVICE AVAILABLE FAULT CURRENT) OF LANDLORDS DISTRIBUTION EQUIPMENT PRIOR TO BID AND WORK COMMENCEMENT. IF FOUND TO BE HIGHER THAN PANEL RATING, NOTIFY YOUR LSD&C PROJECT MANAGER IMMEDIATELY.
3. ELECTRICAL CONTRACTOR SHALL BALANCE ALL PANELS AND ELECTRICAL EQUIPMENT TO 7% (+/-) BETWEEN PHASES: A/B, B/C, A/C, REGARDLESS OF CIRCUITING INDICATED.
4. PROPER CLEARANCE MUST BE MAINTAINED ABOUT ELECTRICAL EQUIPMENT PER N.E.C. FIELD VERIFY EXACT MOUNTING SPACE AVAILABLE IN ELECTRICAL ROOM/AREA PRIOR TO INSTALLATION OF ELECTRICAL EQUIPMENT.
5. ALL PANEL BRANCH CIRCUIT BREAKERS SHALL BE BOLT-ON TYPE.
6. ALL PANEL BUS BARS SHALL BE COPPER.
7. MOUNT A TYPEWRITTEN DIRECTORY BEHIND GLASS OR PLASTIC ON THE INSIDE OF EACH PANEL DOOR AND, ON THE DIRECTORY, SHOW THE CIRCUIT NUMBER AND COMPLETE DESCRIPTION OF ALL OUTLETS ON EACH CIRCUIT.
8. ELECTRICAL CONTRACTOR SHALL MAKE ALL FINAL ELECTRICAL CONNECTIONS FOR A COMPLETE AND OPERABLE ELECTRICAL DISTRIBUTION SYSTEM.
9. ALL PANELBOARDS, SWITCHBOARDS AND LINE VOLTAGE CONTROL EQUIPMENT SHALL BE FACTORY MARKED TO WARN QUALIFIED PERSONS OF POTENTIAL ELECTRIC ARC FLASH HAZARDS. MARKING SHALL BE LOCATED SO AS TO BE CLEARLY VISIBLE TO QUALIFIED PERSONS BEFORE EXAMINATION, ADJUSTING, SERVICING OR MAINTENANCE OF EQUIPMENT.
10. ELECTRICAL CONTRACTOR SHALL MAKE SURE ENTIRE INSTALLATION CONFORMS TO N.E.C. 110.3 – EXAMINATION, IDENTIFICATION, INSTALLATION, AND USE OF EQUIPMENT.
11. SWITCHBOARDS, PANELBOARDS, DISCONNECT SWITCHES, AND CONTACTORS ARE TO BE "LISTED" AND "IDENTIFIED" AS RATED FOR A MINIMUM OF 75°C CONDUCTOR TERMINATION.
12. IFS ENCLOSURE LIGHTING CONTROLS: SOLENOID OPERATED BABR BREAKERS ARE PROVIDED WITH IFS PANELS FOR STORE LIGHTING CONTROLS AND STOREFRONT SIGNS. SEE PANEL SCHEDULES FOR LIGHTING ZONE DESIGNATIONS (ie: ZONE A, B, C, D)
13. IFS ENCLOSURE FURNISHED BY OWNER AND INSTALLED BY ELECTRICAL CONTRACTOR IS HEREIN DESCRIBED:
    A. UNIT WILL BE SHIPPED TO PROJECT IN MULTIPLE SECTIONS AND THE ELECTRICAL CONTRACTOR WILL BE RESPONSIBLE FOR OFF-LOADING OF EQUIPMENT, INSPECTION OF EQUIPMENT FOR DAMAGE, VERIFICATION OF EQUIPMENT RECEIVED FOR PROPER STORAGE, SETTING AND MOVING OF EQUIPMENT INTO SPACE AS WELL AS REASSEMBLING OF SECTIONS INTO ONE COMPLETE UNIT PER MANUFACTURER'S DOCUMENTATION.
    B. ELECTRICAL CONTRACTOR SHALL CONNECT ALL PROVIDED INTERCONNECTING CABLES BETWEEN SECTIONS AND TORQUE CONNECTIONS PER MANUFACTURER'S REQUIREMENTS.
    C. ALL CONNECTIONS WITHIN THE TELEPHONE/DATA SECTION AND HVAC CONTROL SECTION OF THE IFS ENCLOSURE WILL BE DONE BY OTHERS. ELECTRICAL CONTRACTOR WILL BE RESPONSIBLE FOR INSTALLATION OF LOW VOLTAGE CONDUIT SYSTEM (IF REQUIRED BY CODE OR LANDLORD) INTO THESE SECTIONS ONLY.
    D. SWITCHBOARD WILL BE SHIPPED ON AN ENCLOSED SEMI-TRAILER. ELECTRICAL CONTRACTOR MUST ARRANGE FOR A FORKLIFT TO OFF-LOAD AT JOB SITE. ELECTRICAL CONTRACTOR WILL RECEIVE 24 NOTICE PRIOR TO DELIVERY.
14. ELECTRICAL CONTRACTOR SHALL INCLUDE ALL COSTS TO FURNISH AND INSTALL ALL LOW VOLTAGE WIRING IN CONDUIT, AS PART OF BASE BID.

DEMARC DEMOLITION NOTES

1. THE GC SHALL NOT CUT THE MAIN TELEPHONE WIRES LEADING TO THE TERMINATION STRIP (DEMARC BLOCK) OR PHONE SYSTEM.
2. IF THE DEMARC IS TO BE RELOCATED, IT SHALL BE COORDINATED WITH LIMITED TECHNICAL SERVICES (LTS). FOR BBW CALL 1-877-415-7911 AND SELECT OPTION 2. FOR BBW CANADIAN STORE CALL LASENZA 1-877-211-5151 THEN 877#, 3. FOR VS CALL 1-614-415-1011.
3. THE GC SHALL ALLOW ADEQUATE TIME FOR RELOCATION IN THE CONSTRUCTION SCHEDULE.
4. IF THE WALL WITH THE TELEPHONE BLOCK IS SCHEDULED FOR DEMOLITION, THE ENTIRE BACKING PANEL SHALL BE REMOVED FROM THE WALL (WITHOUT DISCONNECTING THE WIRING) AND IT SHALL BE SAFELY SECURED IN THE CEILING UNTIL IT CAN BE RELOCATED TO THE NEW AREA OR REINSTALLED ON WALL.

SERIES RATED NOTES

1. MAIN CIRCUIT BREAKER IN 'PANEL IFS' SHALL BE FULLY RATED TO PROVIDE AN INTERRUPTING RATING OF 65,000 AMPS RMS.
2. MAIN CIRCUIT BREAKER SHALL BE "SERIES" RATED WITH ALL OTHER FEEDER BREAKERS IN 'PANEL IFS' TO PROVIDE AN INTERRUPTING RATING OF 65,000 AMPS RMS.
3. PANELBOARDS OR OTHER EQUIPMENT THAT IS PROTECTED BY "SERIES" RATED OVERCURRENT PROTECTED DEVICES UPSTREAM SHALL BE MARKED WITH A PERMANENT LABEL THAT INDICATES THE SHORT-CIRCUIT RATING OF THE SERIES COMBINATION AND CALLS OUT THE SPECIFIC REPLACEMENT OVERCURRENT DEVICE(S) THAT CAN BE UTILIZED.

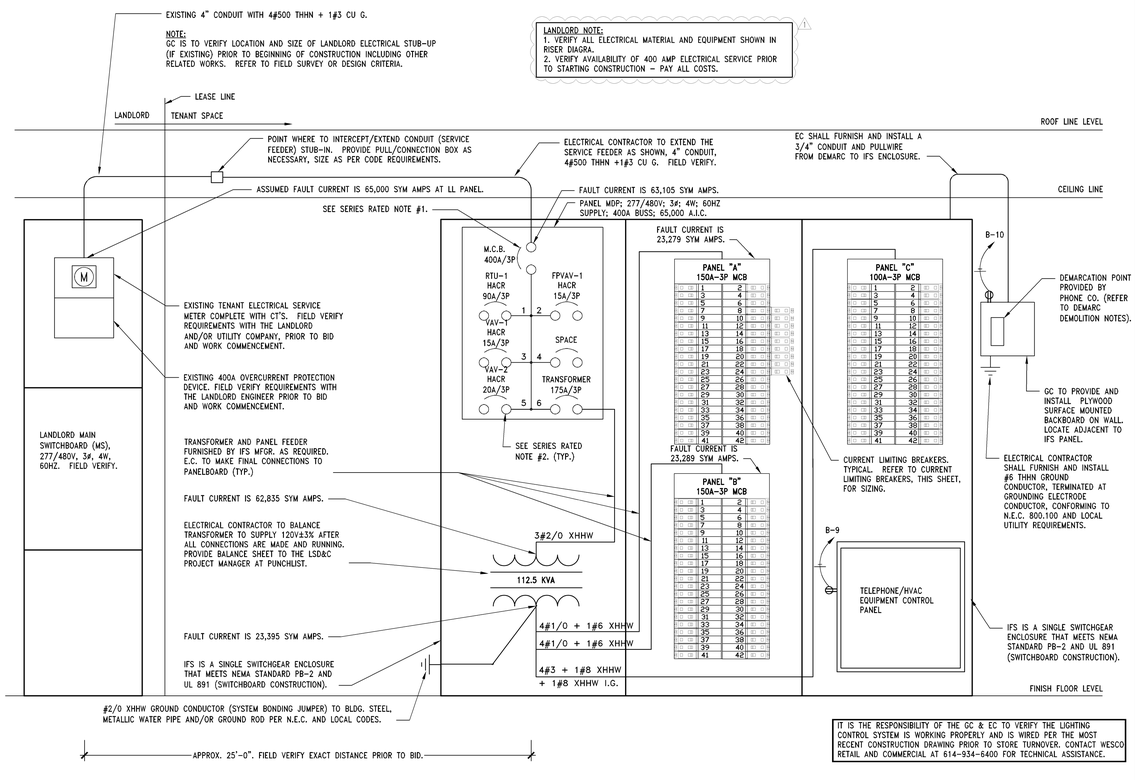

IT IS THE RESPONSIBILITY OF THE GC & EC TO VERIFY THE LIGHTING CONTROL SYSTEM IS WORKING PROPERLY AND IS WIRED PER THE MOST RECENT CONSTRUCTION DRAWING PRIOR TO STORE TURNOVER. CONTACT WESCO RETAIL AND COMMERCIAL AT 614-934-6400 FOR TECHNICAL ASSISTANCE.

Thorson • Baker + Associates
CONSULTING ENGINEERS
3030 West Streetsboro Road (330) 659-6688 Ph.
Richfield, Ohio 44286 (330) 659-6675 Fax

Lbrands
STORE DESIGN & CONSTRUCTION
Three Limited Parkway · Columbus, Ohio 43230
Telephone: 614.415.7000 · Fax: 614.415.7349

THESE DRAW