

LIGHTING DOWNLIGHTS	
SHELVING CABINET (NS-17)	
FINISHES:	
WALL PAINT	PT-1
FLOOR	FC-19
WAINSCOT	T-1 T-3 T-5

<u>LIGHTING</u> DOWNLIGHT	
<u>SHELVING</u> RECESSED CABINET (NS-36)	
<u>FINISHES:</u>	
WALL PAINT	<div>PT-13</div>
FLOOR	<div>FC-18</div>
WALL TILE	<div>T-7</div>

<u>LIGHTING</u> DOWNLIGHT	
<u>SHELVING</u> RECESSED CABINET (NS-36)	
<u>FINISHES:</u>	
WALL PAINT	
FLOOR	
WALL TILE	

FULL	R 10,14,11
42L-A051-D00-LGND	

1. CONTRACTOR TO REVIEW CONSTRUCTION DETAIL SHEETS, FLOOR FINISH PLAN, AND ELEVATIONS FOR HELPFUL CLARIFICATION OF ITEMS AND SURFACES TO BE PAINTED.
2. CONTRACTOR IS TO PRIME ALL GYPSUM BOARD.
3. ALL METAL SURFACES PAINTED BY PAINTER. CONTRACTOR ARE TO BE PRIMED WITH A HIGH QUALITY METAL PRIMER AND FINISHED WITH A HIGH QUALITY SEMI GLOSS PAINT. FINISH COATS MUST NOT REVEAL BRUSH MARKS. SPRAY OR APPLY AS NEEDED.
4. ALL SURFACES TO BE PRIMED WITH AN ALL-PURPOSE 100% ACRYLIC LATEX PRIMER AND FINISHED WITH A LATEX BASE PAINT AS SPECIFIED ABOVE.
5. FOR EXTERIOR STOREFRONTS: PRIME ALL WOOD WITH ALKID PRIMER. USE BENJAMIN MOORE MOORCRACK SUPER SPEC SEMI GLOSS AS BASE FOR ALL COLORS.
6. USING NON-BURNING FILLER, FILL AND PUTTY ALL NAIL HOLES, COUNTERSINK SCREWS, BOLTS, CRACKS, ETC. BEFORE APPLYING FINISH.
7. WOOD DOORS: SEAL BOTTOMS, TOPS, AND EDGES. SAND ALL WOOD DOORS BEFORE FINISHING.
8. NAIL WOOD TRIM IN LEAST CONSPICUOUS LOCATIONS. SET AND FINISH SHROUD.
9. SAND ALL WOOD SURFACES SMOOTH AND EVEN BEFORE PAINTING.
10. SAND ENAILED FINISHES APPLIED TO WOOD OR METAL BETWEEN COATS WITH FINE SANDPAPER TO PRODUCE SMOOTH SURFACES EVERYWHERE.
11. MAKE FINISH WORK UNIFORM, SMOOTH, FREE OF RUNS, SAGS, DEFECTIVE BRUSHING AND CLOGGING. MAKE EDGES OF PAINT ADJOINING OTHER MATERIALS OR COLORS SHARP AND CLEAN WITHOUT OVERLAPPING.

FLOOR COVERING:

1. CRAWLING TRAILS ARE TO BE INSTALLED MAINTAINING A CONSISTENT GROUT JOINT WIDTH THROUGHOUT THE MAXIMUM GROUT JOINT WIDTH IN SALES AREA IS TO BE 1/8", U.O.N.
2. G.C. TO PROVIDE ZINC DIVIDER STRIP AT WOOD TO MARBLE, WOOD TO COCOA MAT, AND AT THE NON-SALES DOOR BETWEEN FLOOR TYPES, WHERE APPLICABLE.

TILE AND GROUT SEALANT

1. APPLY SIL IMPREGNATOR SEALER TO ALL SURFACES PRIOR TO GROUTING USING A MIRA BRUSH APPLICATOR OR A CLEAN, WHITE COTTON TOWEL. APPLY SUFFICIENT AMOUNT TO MOISTEN ALL SURFACES WITHOUT SATURATING JOINTS. AFTER SEALER DRIES FOR 5-5 MINUTES, BUFFING WITH A CLEAN, DRY TOWEL IS IMPORTANT. ALLOW TO CURE FOR 24 HOURS BEFORE GROUTING.
2. AFTER GROUTING, REMOVE ALL EXCESS GROUT AND RESIDUE. ALLOW TO DRY FOR 24 HOURS. IF RESIDUE OR HAZE REMAINS, USE GROUT REMOVER AND FILE DOWN, FOLLOWING THE INSTRUCTIONS ON THE PRODUCT.
3. APPLY SIL IMPREGNATOR SEALER TO GROUT WITH A CLEAN BRUSH OR THE APPLICATOR TIP. REMOVE ANY SEALER FROM PRE-FINISHED SURFACES BEFORE SEALER DRIES. FOR LARGER JOBS, GROUT MAY BE SEALED BY TREATING ENTIRE AREA, INCLUDING MARBLE, A SECOND TIME. ENSURE SEALER DOES NOT FLOOD.
4. SEALER DRIES IN 15-20 MINUTES AND MAY BE WASHED WITH A CLEAN, DRY TOWEL.

IT IS RECOMMENDED TO KEEP SEALED SURFACES DRY AND FREE FROM TRAFFIC FOR 72 HOURS.


G.C. TO INSTALL 6"x 24" & 6" x 36" TILE IN RANDOM PATTERN, ALTERNATING FROM MULTIPLE BOXES AND ROTATING TILES THRU-OUT THE STORE.

1. REFER TO SHEET A00.1 FOR STOREFRONT FINISHES
2. REFER TO SHEET A00.2 FOR FINISH SCHEDULE
3. PAINT ALL EXPOSED WALLS & CEILINGS PT-1 U.O.N.
4. PAINT ALL NON-SALES DOORS PT-5
5. MITER ALL OUTSIDE CORNERS OF WALL BASE - COPE ALL INSIDE CORNERS
6. TILE FLOORING TO BE SET BEFORE WOOD BASE. SCRIBE WOOD BASE TO TOP OF FLOOR AS BEST POSSIBLE AND CAULK GAPS.

FULL	M 10, 14, 11
42N-A051-M00-NOTE	

3/4" = 1'-0"	<div style="text-align: center;"> H 06.03.10 </div>
42D-A051-H00-DETL	

FULL	D 08.31.09
42N-A051-D00-NOTE	

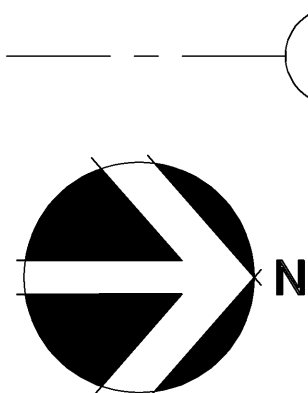

1/4" = 1'-0"	A 10.14.11
42P-A051-A00-PLAN	

Limited brands

LIMITED STORE PLANNING, INC.
d/b/a STORE DESIGN & CONSTRUCTION
Three Limited Parkway • Columbus, Ohio 43230
Telephone: 614.415.7000 • Fax: 614.415.7349

REVISIONS:

REQUIRED BY:	DATE
ELITE CONSTRUCTION GROUP	
LAKE JACKSON, TX	
PHONE: 979-285-0712	
NOTE: THESE PRINTS HAVE BEEN	
REDUCED BY 50 PERCENT SCALE	
WILL BE 50 PERCENT OF WHAT IS	
NOTED ON PLANS	

FLOOR & WALL FINISH PLAN

DRAWING NUMBER:
A05.1