


BARRICADE PLAN AND ELEVATION

1/4" = 1'-0"

05D-A0111-B00-DET1

05.27.13

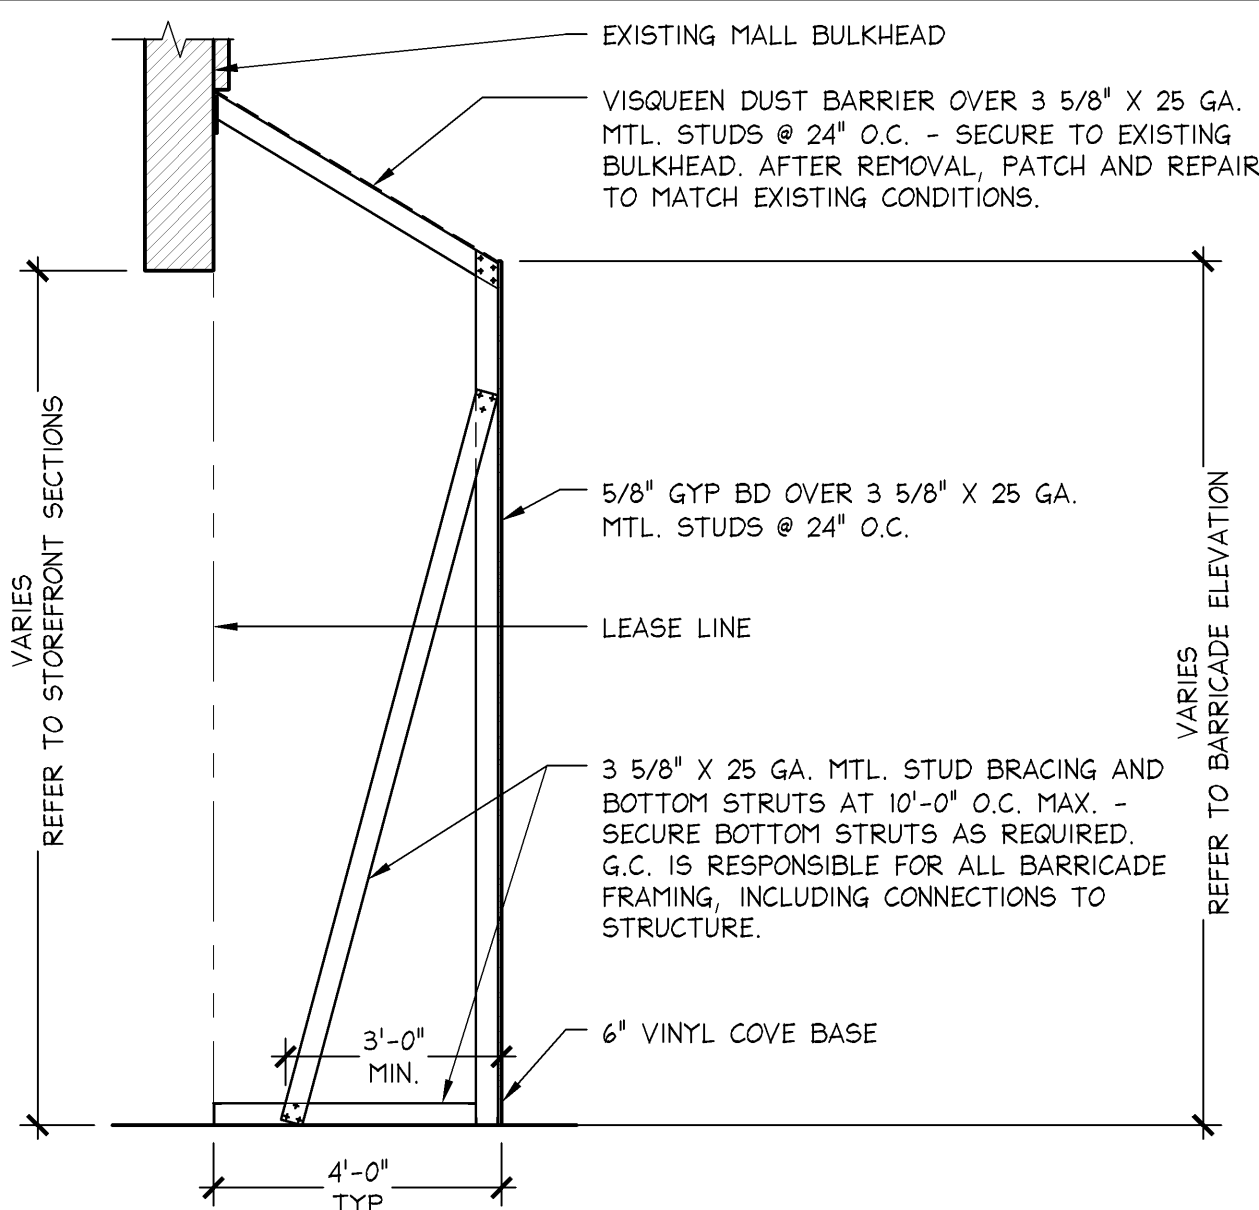

SECTION AT INTERIOR BARRICADE

3/8" = 1'-0"

05D-A0111-E00-DET1

08.22.12

STOREFRONT BARRICADE NOTES

NO SCALE

05N-A0111-A00-NOTE

08.22.12

- GENERAL CONTRACTOR IS TO CONSTRUCT BARRICADE AS SHOWN - IF REQUIREMENTS BY LANDLORD / MALL DIFFER, CONTACT LSOC PROJECT MANAGER.
- CARE IS TO BE TAKEN WHEN DISASSEMBLING AND REMOVING BARRICADE - GENERAL CONTRACTOR IS TO RESTORE MALL FLOORING/SIDEWALK AND BULKHEAD TO A "LIKE NEW" CONDITION.
- GENERAL CONTRACTOR IS TO CONSULT WITH MALL REPRESENTATIVE REGARDING HOURS DURING WHICH WORK ON BARRICADE MAY OCCUR.
- GENERAL CONTRACTOR IS RESPONSIBLE FOR MAINTAINING ALL BARRICADE GRAPHICS AND FINISHES IN "LIKE NEW" CONDITION - GENERAL CONTRACTOR TO REPAIR AND REPAINT ANY DAMAGES AS NECESSARY.
- FOR EXTERIOR LOCATIONS, USE 3/4" CDX - SMOOTH ONE SIDE PLYWOOD OVER WOOD FRAMING, SMOOTH SIDE TO FACE EXTERIOR, PRIME AND PAINT AS NOTED. NOTE: USE CLEAR BOARDS, NO KNOTS OR DEFECTS, FINISH GRADE.
- PROVIDE BATT INSULATION AS NEEDED FOR CLIMATIC CONDITIONS - PROVIDE SOUND INSULATION AS REQUIRED BY MALL MANAGEMENT.
- GENERAL CONTRACTOR TO PROVIDE CONTINUOUS FLOOR PROTECTION AT POINT OF CONTACT WITH FRAMING - IN CASE OF DAMAGE TO MALL FLOORING, TILE SUBCONTRACTOR IS RESPONSIBLE TO PATCH AND REPAIR TO A "LIKE NEW" CONDITION.
- FOR BARRICADE WALLS INTENDED TO RECEIVE FULL BLEED GRAPHICS, GENERAL CONTRACTOR IS TO FILL ALL VOIDS AND SEAMS TO PROVIDE A SMOOTH FINISH FREE OF ANY DEPRESSIONS OR EXPOSED SCREENS PRIOR TO THE INSTALLATION OF GRAPHICS. GENERAL CONTRACTOR IS ALSO RESPONSIBLE FOR PAINTING THE BARRICADE PER THE BARRICADE ELEVATION.
- SIGNAGE INSTALLER IS RESPONSIBLE FOR VERIFYING THAT PAINT IS COMPLETELY DRY PRIOR TO INSTALLATION OF GRAPHICS.
- G.C. TO REMOVE BARRICADE ON THE EVENING PRIOR TO STORE OPENING.