GYP. BD. CEILING SUSPENSION SYSTEM (SEISMIC)

FULL | 42D-A123-M00-DETL | M | 08.14.09

PERFORMANCE REQUIREMENTS:
THE MAIN RUNNERS & CROSS RUNNERS OF THE CEILING SYSTEM AND THEIR SPLICES, INTERSECTION CONNECTORS AND EXPANSION DEVICES SHALL BE DESIGNED AND CONSTRUCTED TO CARRY A MEAN ULTIMATE TEST LOAD OF NOT LESS THAN 180 POUNDS (801 N) OR TWICE THE ACTUAL LOAD, WHICHEVER IS GREATER, IN TENSION WITH 5-DEGREE MISALIGNMENT OF THE MEMBERS IN ANY DIRECTION, & IN COMPRESSION. IN LIEU OF 5-DEGREE MISALIGNMENT, THE LOAD MAY BE APPLIED WITH A 1-INCH (25.4MM) ECCENTRICITY ON A SAMPLE NOT MORE THAN 24 INCHES (610 MM) LONG ON EACH SIDE OF THE SPLICE. THE CONNECTIONS AT SPLICES AND INTERSECTIONS SHALL ALL BE OF THE MECHANICAL INTERLOCKING TYPE.

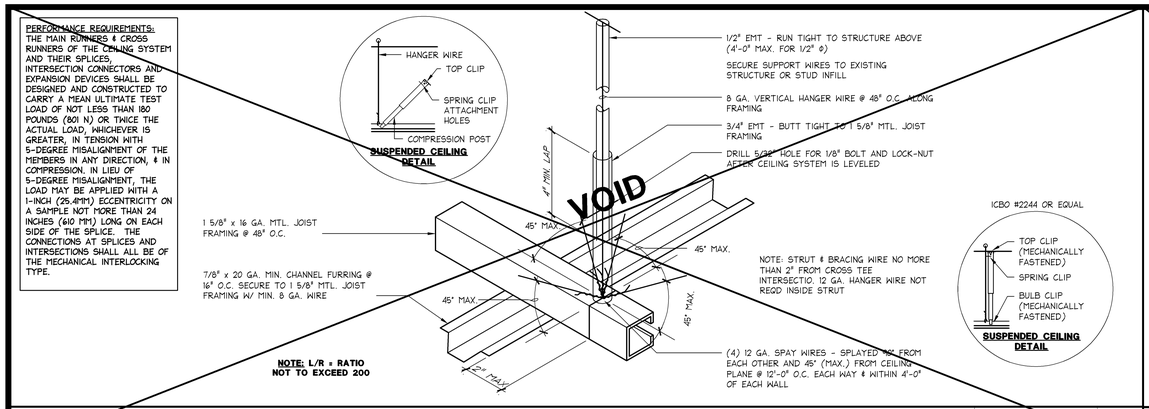

NOTE: L/R = RATIO NOT TO EXCEED 200

TRACK LIGHT - SURFACE MOUNTED

6" = 1'-0" | 42D-A123-D02-DETL | H | 08.14.09

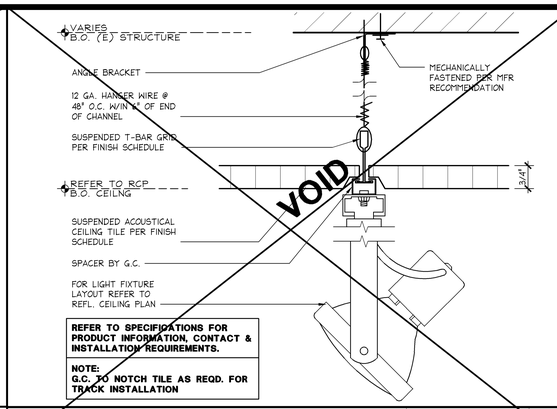

TRACK LIGHT - SURFACE MOUNTED

6" = 1'-0" | 42D-A123-D00-DETL | D | 08.14.09

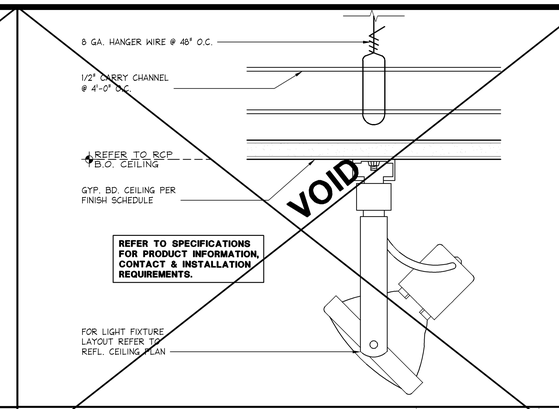

LAY-IN CEILING SUSPENSION SYSTEM

FULL | 42D-A123-L00-DETL | L | 08.14.09

PERFORMANCE REQUIREMENTS:
THE MAIN RUNNERS AND CROSS RUNNERS OF THE CEILING SYSTEM AND THEIR SPLICES, INTERSECTION CONNECTORS AND EXPANSION DEVICES SHALL BE DESIGNED AND CONSTRUCTED TO CARRY A MEAN ULTIMATE TEST LOAD OF NOT LESS THAN 180 POUNDS (801 N) OR TWICE THE ACTUAL LOAD, WHICHEVER IS GREATER, IN TENSION WITH 5-DEGREE MISALIGNMENT OF THE MEMBERS IN ANY DIRECTION, AND IN COMPRESSION. IN LIEU OF 5-DEGREE MISALIGNMENT, THE LOAD MAY BE APPLIED WITH A 1-INCH (25.4MM) ECCENTRICITY ON A SAMPLE NOT MORE THAN 24 INCHES (610 MM) LONG ON EACH SIDE OF THE SPLICE. THE CONNECTIONS AT SPLICES AND INTERSECTIONS SHALL ALL BE OF THE MECHANICAL INTERLOCKING TYPE.

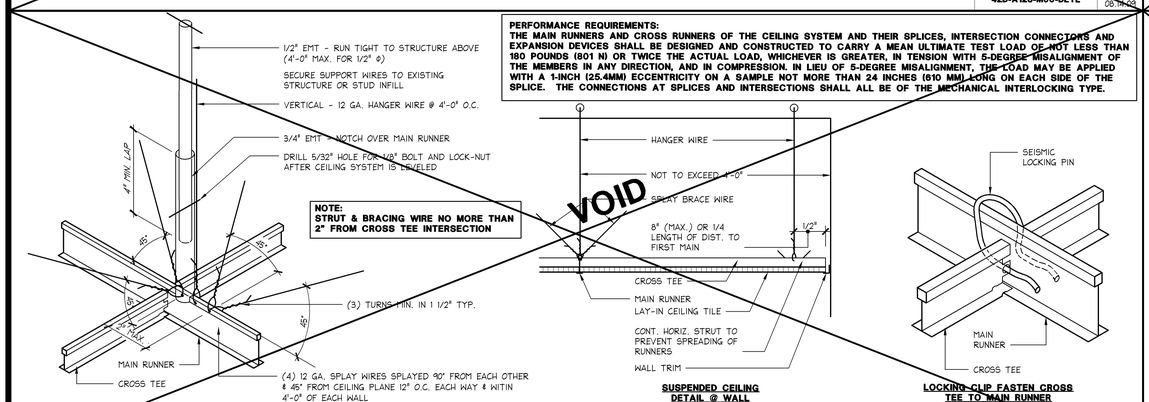

FIXTURE ATTACHMENT @ ACT CEILING

3" = 1'-0" | 42D-A123-G00-DETL | G | 08.14.09

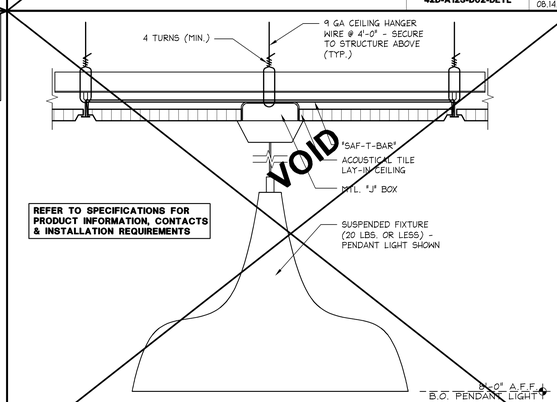

FIXTURE ATTACHMENT @ GYP. CEILING

3" = 1'-0" | 42D-A123-C00-DETL | C | 08.14.09

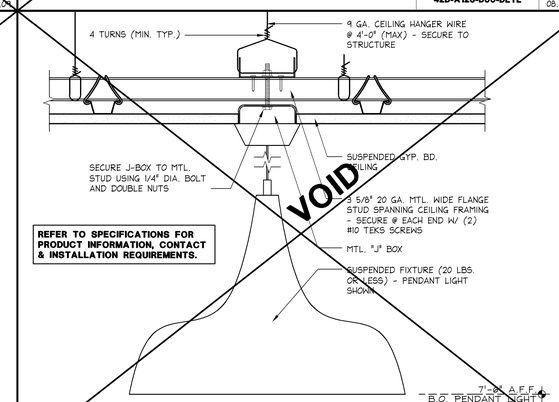

BREAK AREA SUSPENDED CEILING

6" = 1'-0" | 42D-A123-P00-DETL | P | 08.14.09

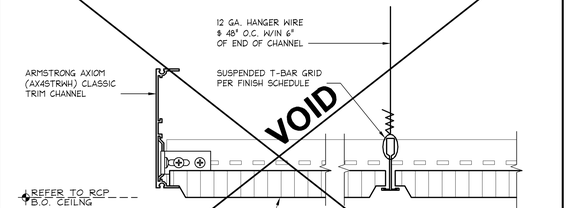

MONITOR SUPPORT @ CEILNG

3" = 1'-0" | 42D-A123-J00-DETL | J | 08.14.09

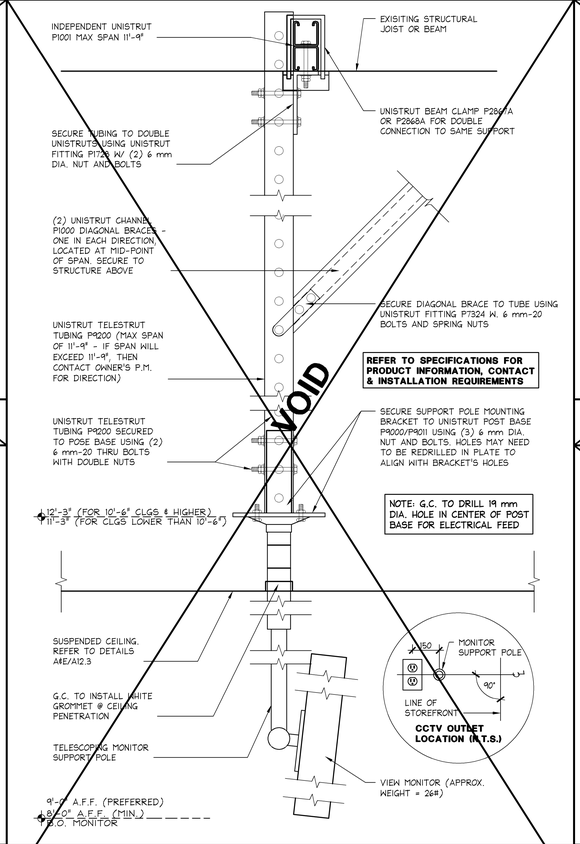

MARKETING TRACK @ ACT CEILNG

1 1/2" = 1'-0" | 42D-A123-F00-DETL | F | 08.14.09

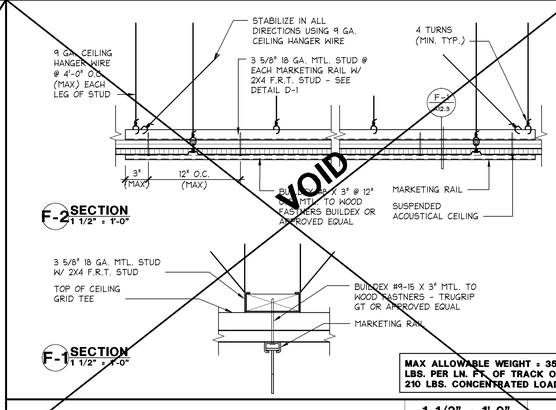

MARKETING TRACK @ GYP. BD. CEILING

3" = 1'-0" | 42D-A123-B00-DETL | B | 08.14.09

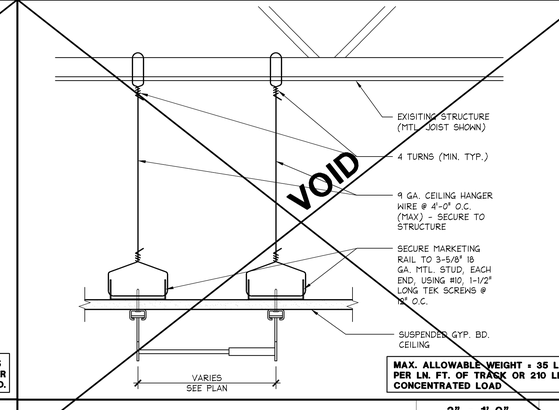

ACCESS PANEL @ GYP. BD. CEILING

3" = 1'-0" | 42D-A123-N00-DETL | N | 08.14.09

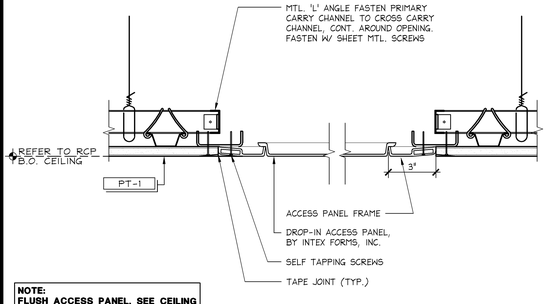

CEILING ASSEMBLY (A.C.T.)

6" = 1'-0" | 42D-A123-E00-DETL | E | 08.14.09

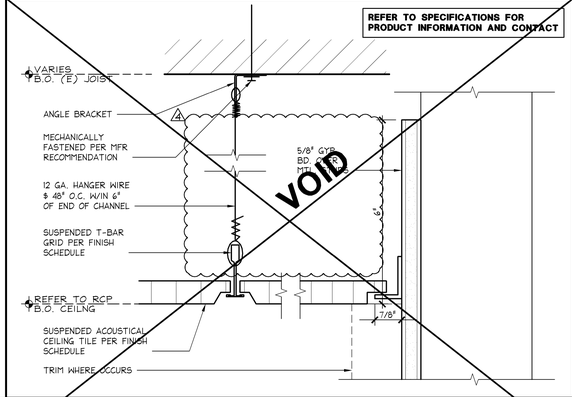

CEILING @ PERIMETER WALL

3" = 1'-0" | 42D-A123-A00-DETL | A | 08.14.09

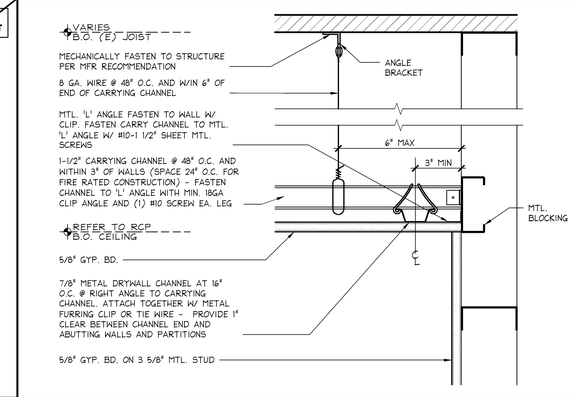

SHREMSHOCK
Shremshock Architects, Inc.
6130 S. Sunbury Rd. Westerville, OH 43081
t: 614 545 4550 | f: 614 545 4555 | shremshock.com
Gerald S. Shremshock, Architect
Timothy J. Shremshock, Architect

ELITE CONSTRUCTION GROUP
LAKE JACKSON, TX
PHONE: 979-285-0712

NOTE: THESE PRINTS HAVE BEEN REDUCED BY 50 PERCENT. SCALE WILL BE 50 PERCENT OF WHAT IS NOTED ON PLANS

Limitedbrands
LIMITED STORE PLANNING, INC.
d/b/a STORE DESIGN & CONSTRUCTION
Three Limited Parkway · Columbus, Ohio 43230
Telephone: 614.415.7000 · Fax: 614.415.7349

PROMOTION OR REUSE.
THESE DRAWINGS AND SPECIFICATIONS ARE COPYRIGHTED AND SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SEC. 102 OF THE COPYRIGHT ACT, 17 U.S.C. §§ AS AMENDED DECEMBER 1990. THE OWNER AND ARCHITECT AGREE THAT THE ARCHITECT IS THE AUTHOR OF THESE DRAWINGS AND SPECIFICATIONS, AND THAT THE ARCHITECT RETAINS ALL RIGHTS UNDER THE COPYRIGHT ACT WITH RESPECT THERETO, ON ANOTHER PROJECT IS PROHIBITED AND CONTRARY TO LAW (UNLESS EXPRESSLY AUTHORIZED BY THE ARCHITECT IN WRITING PURSUANT TO 17 U.S.C. § 120 (1)(2)(3) AS AMENDED DECEMBER 1990 (1)(2)(3) AS AMENDED DECEMBER 1990 (1)(2)(3) AS AMENDED DECEMBER 1990