

- ① TEMPERATURE SENSOR FURNISHED BY MANUFACTURER, INSTALLED AND WIRED BY MECHANICAL CONTRACTOR 48" A.F.F. SEE SHEET M04.1 FOR RESPONSIBILITY SCHEDULE.
- ② DUCT MOUNTED RETURN AIR SMOKE DETECTOR FURNISHED BY FIRE ALARM CONTRACTOR AND INSTALLED IN DUCT BY MECHANICAL CONTRACTOR. POWER WIRING SHALL BE PROVIDED BY ELECTRICAL CONTRACTOR. INTERLOCK TO SHUT DOWN UNIT UPON ACTIVATION OF SMOKE DETECTOR.
- ③ TENANT CONTRACTOR SHALL FIELD VERIFY EXACT LOCATION OF ALL HVAC EQUIPMENT. COORDINATE WITH LANDLORD ENGINEER PRIOR TO BID AND CONSTRUCTION.
- ④ CONNECT TO LANDLORDS EXHAUST SYSTEM. FIELD VERIFY REQUIREMENTS PRIOR TO BID.
- ⑤ SUPPLY AIR TEMPERATURE SENSOR FURNISHED BY MANUFACTURER, INSTALLED AND WIRED IN DUCT BY MECHANICAL CONTRACTOR. SEE SHEET M04.1 FOR RESPONSIBILITY SCHEDULE.
- ⑥ CONNECT TO LANDLORDS OUTSIDE AIR SYSTEM. FIELD VERIFY REQUIREMENTS PRIOR TO BID.
- ⑦ THE MECHANICAL CONTRACTOR SHALL FURNISH AND INSTALL 1-1/4" CHILLED WATER PIPING FROM THE EXISTING LANDLORD MAINS TO THE AIR HANDLING EQUIPMENT AS SHOWN ON PLANS. CONTRACTOR MUST VERIFY EXISTING TAP SIZES, PRIOR TO BID AND INCLUDE NEW TAPS IN BID IF REQUIRED. CONTRACTOR SHALL BE RESPONSIBLE FOR THE LANDLORD'S CLEAN DRAIN DOWN/TAP SIPS. IN THE FIRST TWO WEEKS OF THE PROJECT, THE CONTRACTOR SHALL VERIFY SYSTEM PRESSURE, FLOW AND WATER TEMPERATURE BEFORE INSTALLING SYSTEM. PIPING SHALL BE INSTALLED IN ACCORDANCE WITH THE LANDLORD'S SYSTEM REQUIREMENTS AND AS DETAILED ON PLANS. UPON COMPLETION OF INSTALLATION, CONTRACTOR MUST SUBMIT A CERTIFIED TEST AND REPORT TO THE LANDLORD FOR REVIEW AND APPROVAL. THE REPORT SHALL INCLUDE CHILLED WATER TEMPERATURES AND FLOW RATES (AS APPLICABLE) AND ALL LEAK FLOW BALANCE DATA.

SHREMSHOCK
Shremshock Engineering, Inc.
6130 S. Sunbury Rd., Westerville, OH 43081
t: 614 545 4550 | f: 614 545 4555 | shremshock.com
TX Registration Number: #F-9566

BATH & BODY WORKS


THE GALLERIA II

SOURCE: TYPE: SCOPE: FULL REMODEL
 PROJECT #:

SPACE NO. B3680
 5085 WESTHEIMER RD.
 HOUSTON, TX 77056

PKG. 1+
 1308.150
 1308.150

LANDLORD MECHANICAL COMMENTS:

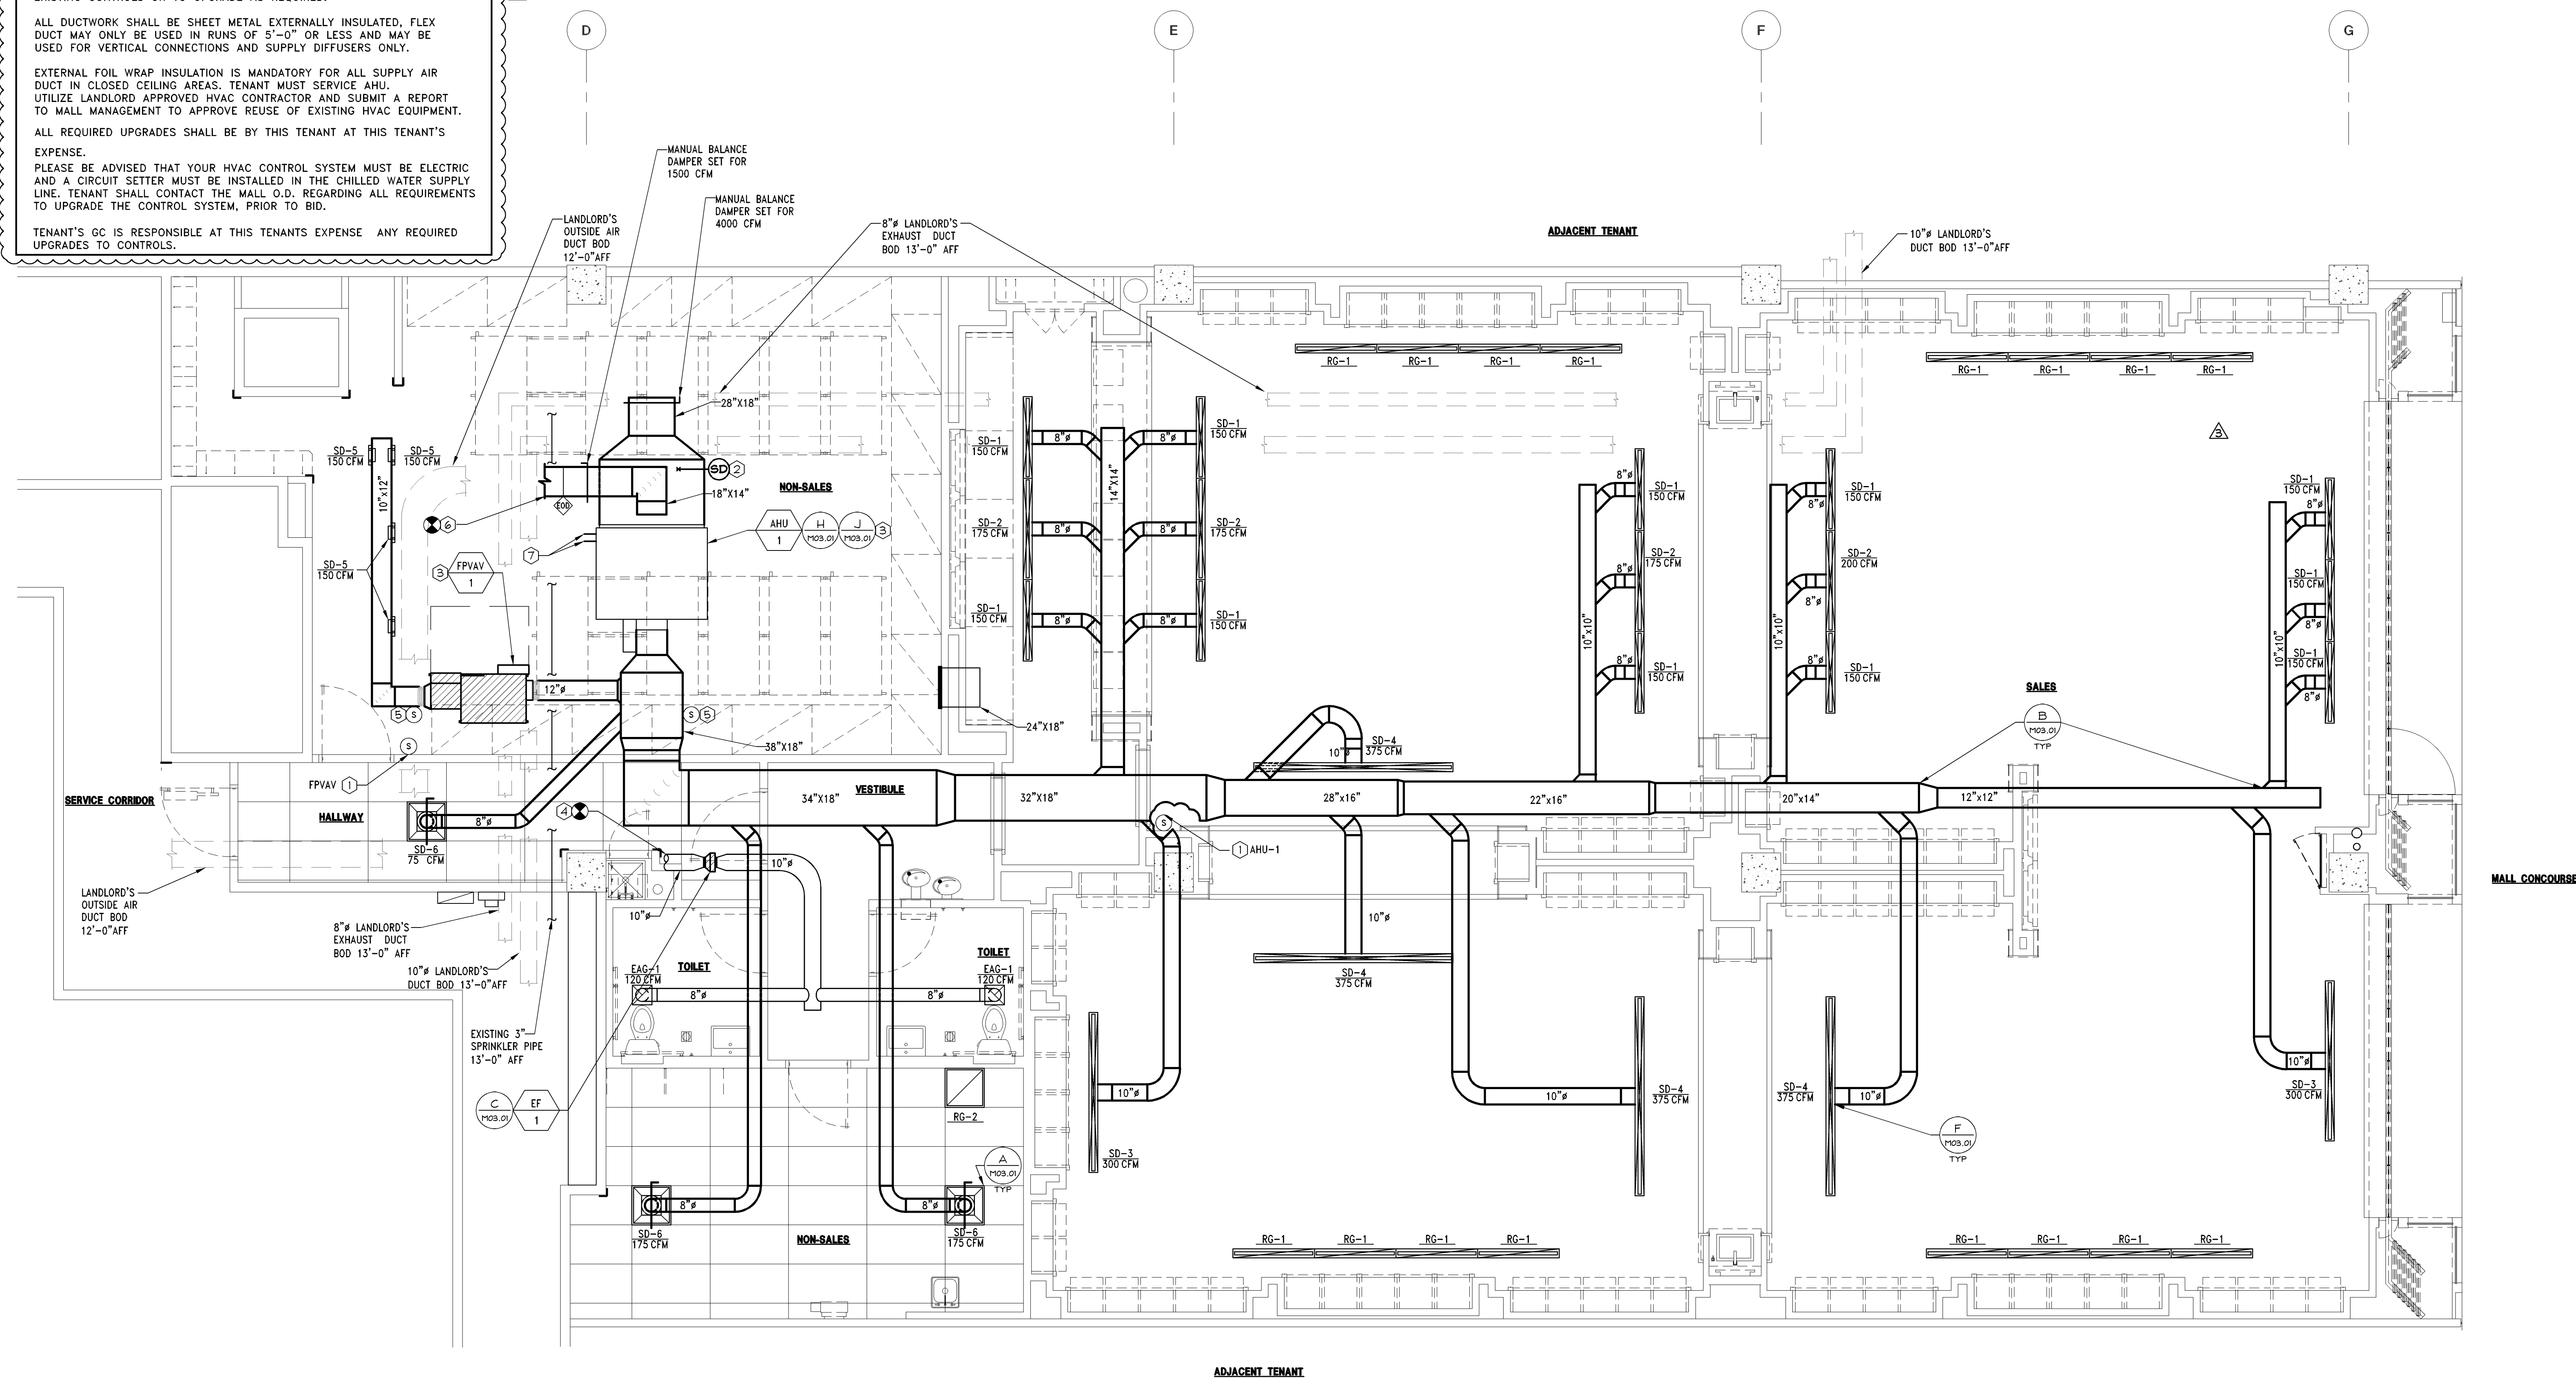

"VERIFY ALL FIELD CONDITIONS PRIOR TO BID"