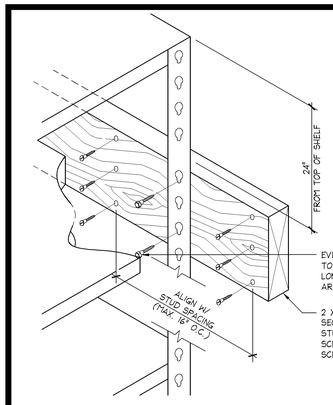

PRE-DRILL FURRING AND COUNTER SINK FURRING SCREWS FLUSH WITH BUT NOT LOWER THAN THE SURFACE OF THE FURRING. ALSO INSTALL WASHERS WITH THE SCREWS WHERE EVER FURRING WOOD IS DETERMINED TO BE SOFT.

FOR CMU WALL, USE 1/4" TOGGLE BOLTS 4" LG @ 24" O.C.

NOTE:
DETAILS SHOWN ARE FOR REFERENCE ONLY AND NOT FOR CONSTRUCTION. REFER TO MFG'S INSTALLATION INSTRUCTIONS.

EVERY "L" OR "T" POST AT WALL SHALL BE ATTACHED TO PRE-DRILLED FURRING STRIP WITH (2) #12 X 2" LONG STEEL HEX HEAD SCREWS. (DRYWALL SCREWS ARE NOT ACCEPTABLE)

2 X 6 FURRING STRIP PRE-DRILLED AT WALL FOR SECURING SHELVING. ATTACH FURRING TO WALL STUDS WITH (3) #12 X 3" LONG STEEL SHEET MTL. SCREWS W. MAX SPACING OF 16" O.C. (DRYWALL SCREWS ARE NOT ACCEPTABLE)

RIVET RACK - FURRING ATTACHMENT

3" = 1'-0" | 42D-A141-S00-DETL | S | 03.01.10

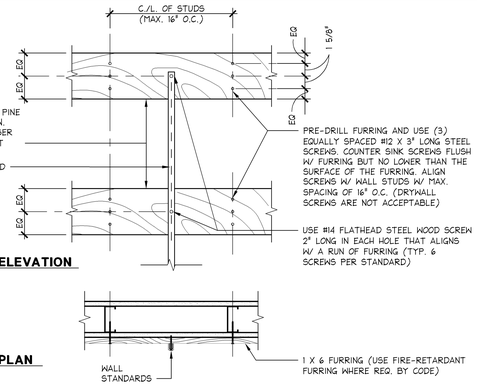

1 ELEVATION

1 PLAN

WALL FURRING DETAIL

1 1/2" = 1'-0" | 42D-A141-M00-DETL | M | 03.01.10

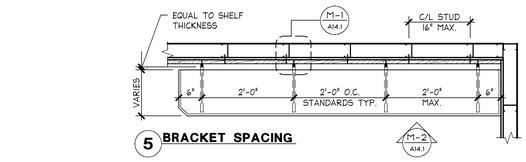

5 BRACKET SPACING

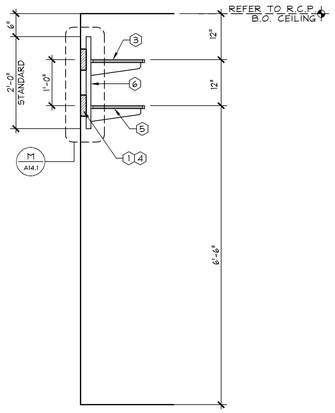

1 SHELVING OFFICE / TOILET ROOM

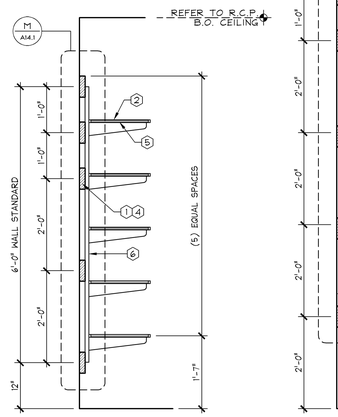

2 SHELVING SERVICE SINK AREA

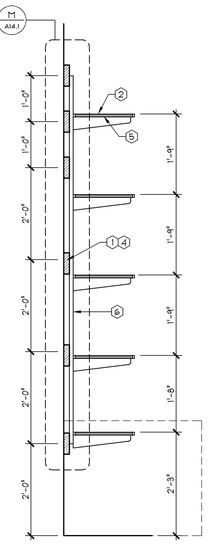

3 SHELVING

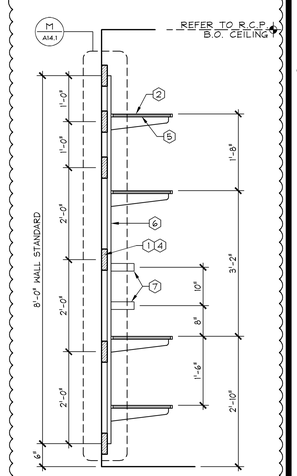

4 SHELVING WHITE BARN - CLOSET

GENERAL NOTES

NO SUBSTITUTIONS WILL BE PERMITTED ON ANY OF THE MATERIALS OR HARDWARE SPECIFIED IN THESE DETAILS, UNLESS OTHERWISE NOTED.

ACCEPTABLE SUBSTITUTES FOR PARTICLE BOARD SHELVES ARE WHITE MELAMINE SHELVING W/ PAINTED FRONT EDGE AND 3/4" HDF WITH ROUTED BULLNOSED EDGE.

ALL PARTICLE BOARD SHELVES ARE TO BE SANDED SMOOTH AND SAND ALL EDGES - SEAL WITH A MINIMUM OF TWO COATS CLEAR FINISH S-4

ALL SHELF MOUNTING HARDWARE, HANGRODS AND WALL STANDARDS ARE SUPPLIED BY OWNER - INSTALLED BY G.C.

NON-SALES SHELVING AND HANGROD NOTES

1. HORIZONTAL 1 X 6 WOOD FURRING BY G.C. - FURRING IS TO BE SPACED SO THAT THE FURRING IS CENTERED AT EACH TOP (3) HOLES OF THE STANDARD AND EVERY OTHER HOLE TO THE BOTTOM OF THE STANDARD. FURRING IS TO BE WHITE PINE, #2 MINIMUM. KNOTS ARE TO BE NO CLOSER THAN 18" APART.
2. 16" DEEP SHELF BY G.C.
3. 14" DEEP SHELF BY G.C.
4. PAINT 1X6 BLOCKING IN STANDARD FINISH RESTROOM AND OFFICE TO MATCH WALL
5. SHELF BRACKETS AND HOLD-DOWN CLIPS.
6. WALL STANDARDS - G.C. TO CUT TO LENGTH & INSTALL TO THE FURRING STRIPS, SEE DETAIL M/A14.1 AND C-5/A14.1
7. WBC-29 WRAPPING HARDWARE

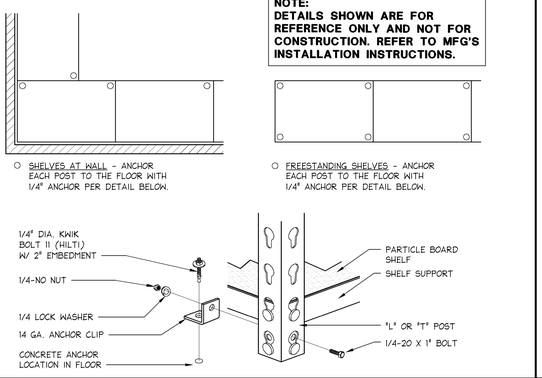

RIVET RACK - ANCHOR DETAIL

3" = 1'-0" | 42D-A141-R00-DETL | R | 09.10.09

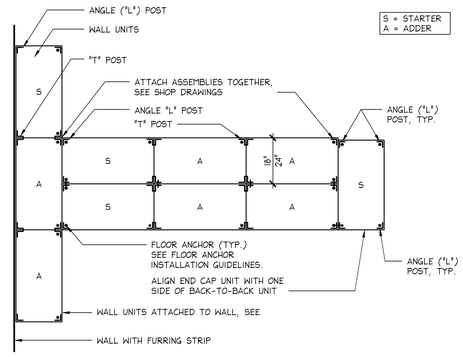

SHELVING INSTALLATION - FLR SUPPORT

1/2" = 1'-0" | 42D-A141-L00-DETL | L | 09.10.09

STANDARDS AND BRACKET DETAILS

3/4" = 1'-0" | 42D-A141-C00-DETL | C | 03.01.10

NOTE:
DETAILS SHOWN ARE FOR REFERENCE ONLY AND NOT FOR CONSTRUCTION. REFER TO MFG'S INSTALLATION INSTRUCTIONS.

NOTE:
SHELVES SHOWN FOR REFERENCE ONLY. REFER TO DETAIL A/A14.1 FOR CORRECT SHELF SPACING.

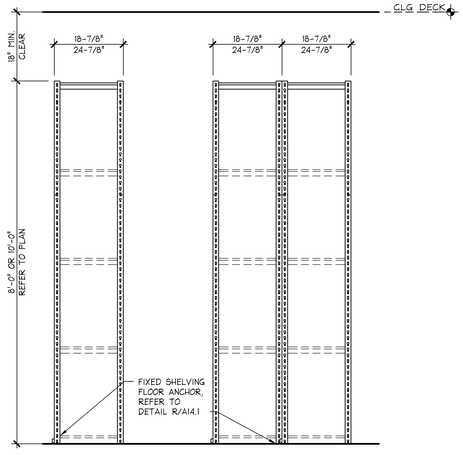

18" SHELVING FIXED ENDS
NO CROSSBRACING REQUIRED

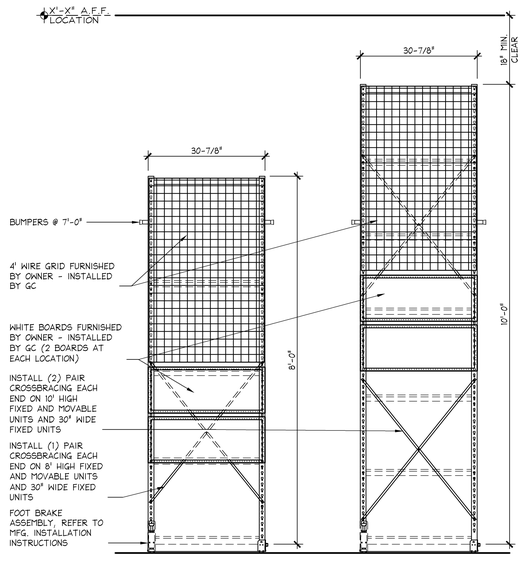

30" SHELVING MOVABLE
CROSSBRACING REQUIRED

NOTES:
1. DIAGONAL BRACING SHALL BE ATTACHED WITH TAMPER RESISTANT SCREWS.
2. INSTALL OWNER PROVIDED DECALS ON CROSS BRACING @ SHELVING.
3. REFER TO MFG. INSTALLATION INSTRUCTIONS FOR CROSSBRACING DETAILS, ATTACHMENT AND SPACING

FIXED & MOVABLE FOLDED - RIVET RACK

3/4" = 1'-0" | 42D-A141-J00-DETL | J | 06.22.2012

NOTE:
DETAILS SHOWN ARE FOR REFERENCE ONLY, NOT FOR CONSTRUCTION. REFER TO MFG'S INSTALLATION INSTRUCTIONS.



1 96" UNIT
(5) SHELVES @ MOBILE
(4) SHELVES @ FIXED



2 120" UNIT
(6) SHELVES @ MOBILE
(5) SHELVES @ FIXED

STOCKROOM SHELVING KEYNOTES

1. PARTICLE BOARD SHELF, TYP. G.C. TO FURNISH AND INSTALL ALL SHELVES WITH SANDED SURFACES TO PREVENT SNAGGING OF CLOTHES. (DO NOT PAINT)
2. (1) FLOOR ANCHOR PER DETAIL R/A14.1 AT EVERY "L" AND "T" POST. "T" POSTS SHOULD BE ANCHORED ON OFFSIDE LOCATIONS ONLY. REFER TO MFG. INSTALLATION INSTRUCTIONS.
3. UNITS MUST BE 18" CLEAR BELOW SPRINKLER HEADS
4. DO NOT INSTALL BOTTOM SHELF, SIDE & REAR SHELF SUPPORTS TO BE INSTALLED.

INSTALLATION NOTES

1. THESE DETAILS ARE FOR GENERAL INFORMATION ONLY. G.C. TO INSTALL SHELVING UNITS PER MANUFACTURES GUIDELINES.

2. G.C. TO SURVEY AND EVALUATE CONDITION AND LEVEL OF STOCKROOM FLOOR CONDITION FOR TRACK ATTACHMENT. CONSULT WITH MANUFACTURER FOR FLOOR TOLERANTS.

3. G.C. TO SECURE CONTINUOUS 1 X 6 WHITE PINE WOOD FURRING W/ MINIMUM KNOTS NO CLOSER THAN 18", TO EVERY WALL STUD TO ENSURE LATERAL STABILITY OF FULLY STOCKED WALL SHELVING, REFER TO DETAIL M/A14.1.

4. ASSEMBLE ALL UPRIGHT ASSEMBLIES PRIOR TO INSTALLING TRACK AND STATIONARY UNITS.

5. PLAN SEQUENCE OF EVENTS AND INSTALLATION PER MANUFACTURER'S INSTRUCTIONS TO ENSURE A FUNCTIONAL SYSTEM.

STARTER AND ADD-ON UNITS AXONOMETRIC

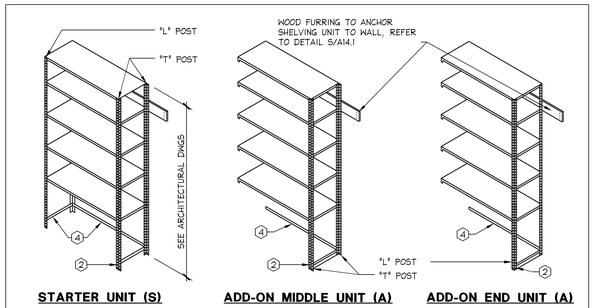

STARTER UNIT (S) | ADD-ON MIDDLE UNIT (A) | ADD-ON END UNIT (A)

FIXED SHELVING UNIT DETAILS

3/8" = 1'-0" | 42D-A141-A00-DETL | A | 03.05.10

SHREMSHOCK
Shremshock Architects, Inc.
6130 S. Sunbury Rd. Westerville, OH 43081
t: 614 545 4550 | f: 614 545 4555 | shremshock.com
Gerald S. Shremshock, Architect
Timothy J. Shremshock, Architect

ELITE CONSTRUCTION GROUP
LAKE JACKSON, TX.
PHONE: 979-285-0712
NOTE: THESE PRINTS HAVE BEEN REDUCED BY 50 PERCENT. SCALE WILL BE 50 PERCENT OF WHAT IS NOTED ON PLANS

Limitedbrands
LIMITED STORE PLANNING, INC.
d/b/a STORE DESIGN & CONSTRUCTION
Three Limited Parkway · Columbus, Ohio 43230
Telephone: 614.415.7000 · Fax: 614.415.7349

PROHIBITION ON REUSE:
THESE DRAWINGS AND SPECIFICATIONS WERE PREPARED FOR USE ON A SPECIFIC SITE. CONTEMPORANEOUSLY WITH THEIR USE, THEY ARE NOT INTENDED FOR USE ON A DIFFERENT SITE WITHOUT ADAPTATION BY A LICENSED ARCHITECT. ANY REUSE WITHOUT SUCH ADAPTATION SHALL BE AT THE USER'S SOLE RISK AND WITHOUT LIABILITY TO THE ARCHITECT. ANY REPRODUCTION THEREOF, ON ANOTHER PROJECT IS PROHIBITED AND CONTRARY TO LAW UNLESS EXPRESSLY AUTHORIZED IN WRITING BY THE ARCHITECT AND PAID FOR BY A LICENSED BUILDER DURING CONSTRUCTION ("LSDC").

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LSDC AND SHALL NOT BE DEPOSITED IN ANY PUBLIC RECORDS. THESE DRAWINGS AND SPECIFICATIONS ARE COPYRIGHTED AND SUBJECT TO COPYRIGHT PROTECTION AS AN "ARCHITECTURAL WORK" UNDER SEC. 102 OF THE COPYRIGHT ACT, 17 U.S.C. §1 AMENDED DECEMBER 1990. THE COPYRIGHT PROTECTION INCLUDES, WITHOUT LIMITATION, THE OVERALL FORM, ARRANGEMENT AND COMPOSITION OF SPACES AND ELEMENTS OF THE DESIGN, INCLUDING PLANS, SECTIONS, ELEVATIONS, PERSPECTIVES, AND PICTORIAL REPRODUCTIONS. NO REPRODUCTION OF THESE DRAWINGS AND SPECIFICATIONS IS AUTHORIZED WITHOUT THE PRIOR WRITTEN CONSENT OF LSDC. ALL DRAWINGS AND SPECIFICATIONS MUST BE RETURNED TO LSDC UPON COMPLETION OF THEIR INTENDED USE, UNLESS OTHERWISE AGREED TO IN WRITING BY LSDC.

PROJECT INFORMATION:

24200161

BATH & BODY WORKS
THE GALLERIA II
SPACE NO.: B3680
5085 WESTHEIMER RD.
HOUSTON, TX 77056

SCOPE: FULL REMODEL | PACKAGE: PKG 1+
DESIGN TYPE: EASTON-G | GENERATION: 141Sa
LSDAC PROJECT #: 00061216 | A/E PROJECT #: 130840

REVISIONS:

	REQUIRED BY:	DATE:
1	BUILDING DEPARTMENT COMMENTS	04/11/14
2	BUILDING DEPARTMENT COMMENTS	05/8/14
3	DESIGN CHANGES/ LANDLORD COMMENTS/ MASTERS UPDATES	05/28/14
4	DESIGN CHANGES	06/27/14

DATE ISSUED: 3/7/14
DESIGNED BY: SB
DRAWN BY: JLH
CHECKED BY: RHW

STOCKROOM SHELVING DETAILS

DRAWING NUMBER:
A14.1