LIGHT GAGE FRAMING - CROSS REFERENCE GUIDE

MIL. THICKNESS - GAGE NUMBER CROSS REFERENCE

25 GA. ------ 18 MIL	16 GA. ------ 54 MIL
22 GA. ------ 27 MIL	14 GA. ------ 68 MIL
20 GA. ------ 33 MIL	12 GA. ------ 97 MIL
18 GA. ------ 43 MIL	

EXAMPLE CROSS REFERENCE:

3 5/8", 18 GA STRUCTURAL METAL STUD = 362 S 162 - 43 METAL STUD

STUD DEPTH	(S=STUD) (T=TRACK)	FLANGE WIDTH	STUD THICKNESS
=3.625" =3 5/8"		=1.625" =1 5/8"	=43 MIL (18 GA.)

TYPICAL STRUCTURAL STUDS AND TRACKS

FORMER STANDARD DESIGNATION	NEW SSMA DESIGNATION (STEEL STUD MANUFACTURERS ASSOCIATION)
2 1/2", 20 GA. STUD w/ 1 5/8" FLANGE 2 1/2", 18 GA. STUD w/ 1 5/8" FLANGE	250S162-33 250S162-43
3 5/8", 20 GA. STUD w/ 1 5/8" FLANGE 3 5/8", 18 GA. STUD w/ 1 5/8" FLANGE	362S162-33 362S162-43
6", 20 GA. STUD w/ 1 5/8" FLANGE 6", 18 GA. STUD w/ 1 5/8" FLANGE	600S162-33 600S162-43
8", 18 GA. STUD w/ 1 5/8" FLANGE 8", 16 GA. STUD w/ 1 5/8" FLANGE	800S162-43 800S162-54
10", 18 GA. STUD w/ 1 5/8" FLANGE 10", 16 GA. STUD w/ 1 5/8" FLANGE	1000S162-43 1000S162-54
12", 16 GA. STUD w/ 1 5/8" FLANGE 12", 12 GA. STUD w/ 1 5/8" FLANGE	1200S162-54 1200S162-97
1 5/8", 22 GA. TRACK w/ 1 1/4" LEG 1 5/8", 20 GA. TRACK w/ 1 1/4" LEG	162T125-27 162T125-33
2 1/2", 20 GA. TRACK w/ 1 1/4" LEG 2 1/2", 20 GA. TRACK w/ 2" LEG 2 1/2", 18 GA. TRACK w/ 1 1/4" LEG 2 1/2", 18 GA. TRACK w/ 2" LEG	250T125-33 250T200-33 250T125-43 250T200-43
3 5/8", 20 GA. TRACK w/ 1 1/4" LEG 3 5/8", 20 GA. TRACK w/ 2" LEG 3 5/8", 18 GA. TRACK w/ 1 1/4" LEG 3 5/8", 18 GA. TRACK w/ 2" LEG	362T125-33 362T200-33 362T125-43 362T200-43
6", 20 GA. TRACK w/ 1 1/4" LEG 6", 20 GA. TRACK w/ 2" LEG 6", 18 GA. TRACK w/ 1 1/4" LEG 6", 18 GA. TRACK w/ 2" LEG	600T125-33 600T200-33 600T125-43 600T200-43

TYPICAL HAT (FURRING) CHANNELS

7/8", 25 GA. FURRING CHANNEL	087F125-18
7/8", 22 GA. FURRING CHANNEL	087F125-27

LIGHT GAGE FRAMING SCREW CONNECTIONS

UNLESS NOTED, LIGHT GAGE FRAMING CONNECTIONS SHALL BE MADE USING #8 SCREWS. SEE DETAIL A/S03.1 FOR DIAGONAL BRACING CONNECTIONS.

AT LOCATIONS WHERE SHEATHING MATERIAL IS PLACED AGAINST THE SCREW HEADS OF LIGHTGAGE METAL FRAMING CONNECTIONS, PANCAKE HEAD SCREWS SHALL BE USED SO THAT THE SHEATHING MATERIAL REMAINS STRAIGHT AND SMOOTH.

LIGHT GAGE METAL FRAMING -- -- R

TABLE 1

STUD SIZE MATRIX FOR ALL INTERIOR PARTITIONS EXCEPT AS NOTED IN TABLES 2 & 3

SEISMIC DESIGN CATEGORIES A, B & C.

STUD DESIGNATION	STUD DEPTH	FLANGE WIDTH	STUD GAUGE	STUD SPACING	MAXIMUM WALL HEIGHT SPANNING FROM FLOOR TO DECK
362S162-33	3 5/8"	1 5/8"	20	16"	22'-0"
362S162-43	3 5/8"	1 5/8"	18	16"	25'-0"
362S162-54	3 5/8"	1 5/8"	16	16"	28'-0"
600S162-33	6"	1 5/8"	20	16"	30'-0"
600S162-43	6"	1 5/8"	18	16"	35'-0"
600S162-54	6"	1 5/8"	16	16"	38'-0"

TABLE 2

STUD SIZE MATRIX FOR UNIT 1 & UNIT 5 CABINET WALLS

SEISMIC DESIGN CATEGORIES A, B & C.

FULL HEIGHT VERTICAL STUDS SHALL BE 3 5/8", 20 GA STUDS (WITH 1 5/8" FLANGE) @ 16" O.C. MAX. INSTALL DIAGONAL BRACING AT APPROXIMATELY 11'-6" A.F.F. AS SHOWN IN THESE SECTIONS

TABLE 3

STUD SIZE MATRIX FOR PARTITIONS THAT LATERALLY SUPPORT FLOOR MOUNTED STOCKROOM SHELVING

SEISMIC DESIGN CATEGORIES A, B & C.

SEE DRAWING S03.2

NOTE: FOR ALL THREE TABLES ABOVE, AT LOCATIONS WHERE SHELVING OCCURS ON EACH SIDE OF A SINGLE STUD WALL, REDUCE THE STUD SPACING SHOWN IN THE TABLES ABOVE BY ONE-HALF, AND REDUCE THE DIAGONAL SPACING SHOWN IN DETAIL A/S03.1 BY ONE-HALF.

NOTES:
1. DESIGN BASED ON ALLOWABLE DEFLECTION OF L/200.
2. DESIGN BASED ON Fy = 33 KSI FOR 3 5/8" & 6" STUDS LESS THAN 16 GAUGE.
   Fy = 50 KSI FOR 3 5/8", 16 GAUGE.
3. PROVIDE HORIZONTAL BRIDGING @ 5'-0" O.C. MAX. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.
4. DESIGN BASED ON MINIMUM 5 PSF LATERAL LOAD, OR LATERAL SEISMIC LOAD, WHICHEVER CONTROLS.
5. TABLE IS VALID FOR UP TO (2) LAYERS OF 5/8" THK GYPSUM BOARD ON EACH SIDE OF METAL STUDS.

SEISMIC DESIGN CATEGORIES A, B & C.

STUD SIZE MATRIX NONE 42DA121NOMATX N

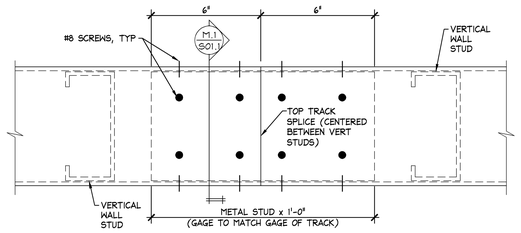



TOP TRACK SPLICE

N.T.S. 42DS01IMODETL M

CODED NOTES

1. NOT USED
2. NOT USED
3. NOT USED
4. DBL 12" DP, 14 GA BEAM WITH 3 5/8", 14 GA TRACK TOP & BOTTOM. (PROVIDE 14 GA WEB STIFFENER AT ALL BEAM BEARING POINTS. INSTALL PER MANUFACTURER'S RECOMMENDATIONS.)



5. W12x26 BEAM
6. BUILT-UP BOX COLUMN - DBL 3 5/8" DP, 20 GA STUDS WITH 3 5/8", 20 GA TRACK, EA SIDE. ATTACH BOX COLUMN TO BEAM PER DETAIL C/S03.1, UNLESS NOTED.



7. HSS3x3x1/4 COLUMN. SEE DETAIL K/S02.1 FOR ATTACHMENT DETAILS.

CODED NOTES -- -- L

STRUCTURAL NOTES:

A. CONTROLLING BUILDING CODE: 2006 INTERNATIONAL BILDING CODE w/CITY OF HOUSTON, TX LOCAL AMENDMENTS
SEISMIC DESIGN CATEGORY 'A'

B. LIGHT GAGE FRAMING

1. COLD FORMED STEEL FRAMING SHALL CONFORM TO REQUIREMENTS OF THE LATEST EDITION OF AISI "SPECIFICATION FOR DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS".
2. ALL MEMBERS SHALL BE FORMED FROM CORROSION-RESISTANT STEEL (GRADE 33 UNLESS OTHERWISE SPECIFIED) AND THEN ZINC COATED PER ASTM A653-94, GRADE G-60.
3. ALL COLD FORMED MEMBERS SHALL COME FROM A SINGLE MANUFACTURER, "CLARK" OR EQUAL. THE INSTALLATION SHALL COMPLY WITH THE MANUFACTURER'S RECOMMENDATIONS.
4. UNLESS NOTED, TRACK GAGE SHALL EQUAL STUD GAGE AND TRACK FLANGE WIDTH SHALL EQUAL 1 1/4". DEEP LEG TRACK WITH 2" FLANGE WIDTH SHALL BE USED WHERE NOTED ON DRAWINGS.
5. SEE DETAIL R/S01.1 FOR LIGHT GAGE METAL FRAMING DESIGNATIONS.
6. BASE TRACKS SHALL BE SET ON SMOOTH AND LEVEL CONCRETE OR NON-SHRINK GROUT SUCH AS "MASTERFLOW 713" BY MASTER BUILDERS.
7. FASTENING OF COMPONENTS SHALL BE WITH SELF-DRILLING CADMIUM PLATED OR ZINC COATED SCREWS (UNLESS NOTED). SCREWS SHALL BE OF SUFFICIENT SIZE TO ENSURE THE STRENGTH OF THE CONNECTION.

   SEE DETAIL R/S01.1 FOR ADDITIONAL SCREW REQUIREMENTS.
8. SPLICES IN FRAMING COMPONENTS OTHER THAN BOTTOM WALL TRACK ARE NOT PERMITTED, EXCEPT AS SPECIFICALLY DETAILED IN STRUCTURAL DRAWINGS. SEE DETAIL M/S01.1 FOR TOP TRACK SPLICE DETAIL.
9. STUDS SHALL BE INSTALLED SO THE ENDS ARE POSITIONED AGAINST THE INSIDE OF THE RUNNER TRACK WEB PRIOR TO FASTENING AND SHALL BE ATTACHED TO BOTH FLANGES OF THE UPPER AND LOWER RUNNER TRACKS, WITH (1)-#8 SCREW IN EACH FLANGE OF EACH STUD, UNLESS NOTED.

C. STRUCTURAL STEEL

1. STRUCTURAL STEEL SHALL CONFORM TO THE AISC "SPECIFICATIONS FOR THE DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS", LATEST EDITION.
2. WELDED CONNECTIONS SHALL CONFORM TO THE LATEST REVISED CODE OF THE AMERICAN WELDING SOCIETY, AWS D1.1. WELDING ELECTRODES SHALL BE E70XX, LOW HYDROGEN.
3. BOLTS AND BOLTED CONNECTIONS SHALL CONFORM TO THE REQUIREMENTS OF THE "SPECIFICATIONS FOR STRUCTURAL JOINTS USING ASTM A325 OR A490 BOLTS" JUNE 30, 2004. SEE SECTIONS AND DETAILS FOR SPECIFIC CONNECTION REQUIREMENTS.
4. STRUCTURAL STEEL BEAMS SHALL CONFORM TO THE REQUIREMENTS OF ASTM A992, Fy = 50 KSI. STEEL TUBE SHALL CONFORM TO THE REQUIREMENTS OF ASTM A500, GRADE B, Fy = 46 KSI. STEEL PIPE SHALL CONFORM TO THE REQUIREMENTS OF ASTM A501, Fy = 36 KSI. ALL OTHER STEEL SHAPES, PLATES, ETC., SHALL CONFORM TO THE REQUIREMENTS OF ASTM A36, Fy = 36 KSI.

E. SPECIAL INSPECTIONS

SPECIAL INSPECTION SHALL BE COORDINATED AND PAID FOR BY THE OWNER. SPECIAL INSPECTION SHALL BE PERFORMED IN ACCORDANCE WITH THE REQUIREMENTS OF THE CONTROLLING BUILDING CODE FOR THE FOLLOWING ITEMS:

1. DUTIES AND RESPONSIBILITIES OF THE SPECIAL INSPECTOR:
   a. THE SPECIAL INSPECTOR SHALL OBSERVE THE WORK ASSIGNED TO BE CERTAIN IT CONFORMS TO THE APPROVED CONSTRUCTION DOCUMENTS.
   b. THE SPECIAL INSPECTOR SHALL FURNISH INSPECTION REPORTS TO THE BUILDING OFFICIAL, AND TO THE REGISTERED DESIGN PROFESSIONAL IN CHARGE.
   c. ALL DISCREPANCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE CONTRACTOR FOR CORRECTION. IF THE DISCREPANCIES ARE NOT CORRECTED, THE DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE BUILDING OFFICIAL AND TO THE REGISTERED DESIGN PROFESSIONAL IN CHARGE PRIOR TO THE COMPLETION OF THAT PHASE OF THE WORK.
   d. A FINAL REPORT DOCUMENTING REQUIRED SPECIAL INSPECTIONS AND CORRECTION OF ANY DISCREPANCIES NOTED IN THE INSPECTIONS SHALL BE SUBMITTED TO THE BUILDING OFFICIAL AND ARCHITECT OF RECORD PRIOR TO THE ISSUANCE OF A CERTIFICATE OF OCCUPANCY.
2. POST INSTALLED ANCHORS.
   a. RECORD PRODUCT DESCRIPTION INCLUDING PRODUCT NAME (PERIODIC)
   b. VERIFY ANCHOR, GRADE, DIAMETER, LENGTH, AND CLEANLINESS. (PERIODIC)
   c. VERIFY DRILL BIT DIAMETER, INCLUDING VERIFICATION OF DIAMOND-CORE AND CARBIDE-TIPPED DRILL BIT COMPLIANCE WITH ANSI B212.15. (PERIODIC)
   d. VERIFY DEPTH AND CLEANLINESS OF HOLES. (PERIODIC)
   e. VERIFY THAT THE ANCHOR INSTALLATION AND LOCATION, INCLUDING SPACING AND EDGE DISTANCE, ARE IN COMPLIANCE WITH THE MANUFACTURER'S SPECIFICATIONS. (PERIODIC)
4. STRUCTURAL STEEL
   a. MATERIAL VERIFICATION OF STRUCTURAL STEEL (PERIODIC)
   b. MATERIAL VERIFICATION OF WELD FILLER MATERIALS (PERIODIC)
   c. VISUAL INSPECTION OF FIELD WELDS:
      - ALL FILLET WELDS (PERIODIC)
      - ALL BOLTED CONNECTIONS (PERIODIC)

STRUCTURAL SPECIFICATIONS -- -- C

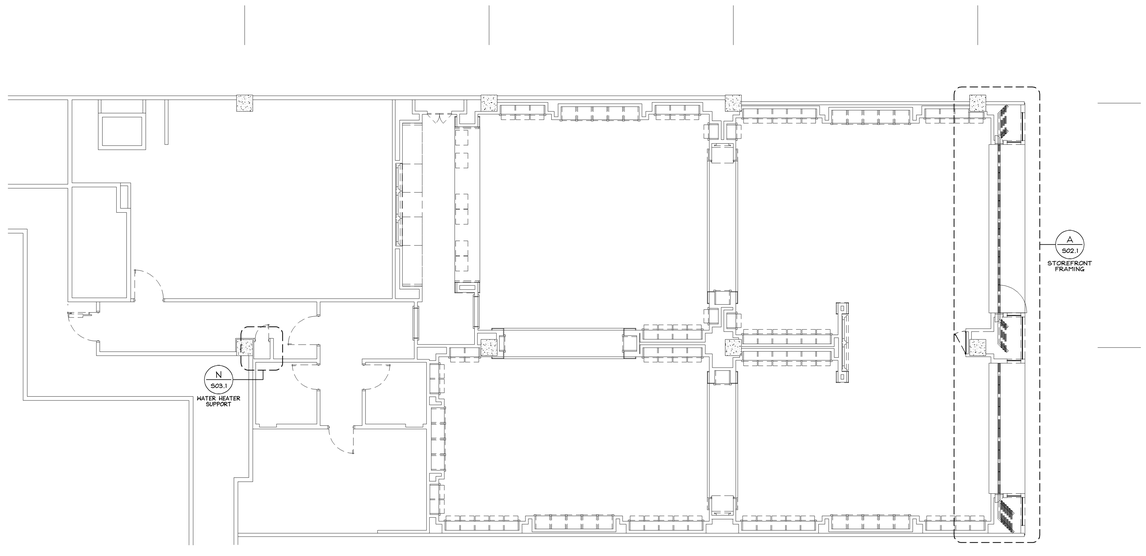

LOCATION PLAN -- -- A

PAUL J FORD AND COMPANY
250 EAST BROAD STREET
SUITE 600
COLUMBUS, OHIO 43215
614-221-6679
A35014-0023

Limitedbrands

LIMITED STORE PLANNING, INC.
d/b/a STORE DESIGN & CONSTRUCTION
Three Limited Parkway • Columbus, Ohio 43230
Telephone: 614.415.7000 • Fax: 614.415.7349

PROHIBITION ON RESALE
THESE PLANS AND SPECIFICATIONS ARE PROVIDED TO THE OWNER FOR USE ON A SPECIFIC SITE. CONTEMPORANEOUSLY WITH THEIR DELIVERY, THEY ARE NOT INTENDED FOR USE ON A DIFFERENT PROJECT SITE OR AT A LATER TIME. RESALE OF THESE DRAWINGS AND SPECIFICATIONS OR USE FOR PURPOSES OTHER THAN AUTHORIZED IN WRITING BY LIMITED STORE PLANNING, INC. IS STRICTLY PROHIBITED.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LSDC AND SHALL NOT BE REPRODUCED IN ANY MANNER OR USED ON ANY OTHER PROJECT EXCEPT BY WRITTEN AGREEMENT WITH LSDC. NO REPRODUCTION OF ANY PORTION OF THESE DRAWINGS AND SPECIFICATIONS IN ANY MANNER OR FORM IS TO BE MADE WITHOUT THE PRIOR WRITTEN AUTHORIZATION OF THE LSDC. ALL ORIGINALS OR REPRODUCTIONS OF THESE DRAWINGS AND SPECIFICATIONS MUST BE RETURNED TO LSDC UPON COMPLETION OF EIGHT MONTHS FROM THE DATE OF ISSUANCE UNLESS OTHERWISE AGREED BY THE LSDC.

COPYRIGHT NOTICE:
THESE PLANS AND SPECIFICATIONS CONSTITUTE ORIGINAL AND UNPUBLISHED WORK CREATED BY LIMITED STORE PLANNING, INC. D/B/A LIMITED STORE DESIGN AND CONSTRUCTION AND THE "ARCHITECTURAL WORK" UNDER SEC. 102 OF THE COPYRIGHT ACT, 17 U.S.C. AS AMENDED DECEMBER 1990. ALL RIGHTS RESERVED. USE, REPRODUCTION OR DISTRIBUTION OF THESE PLANS AND SPECIFICATIONS, IN WHOLE OR IN PART, BY ANY MEANS WHATSOEVER, INCLUDING, WITHOUT LIMITATION, ELECTRONIC, MECHANICAL AND COPYING OF IMAGES, AND INFORMATION STORAGE AND RETRIEVAL SYSTEMS, IS EXPRESSLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF LIMITED STORE PLANNING, INC. ANY UNAUTHORIZED USE OF THESE PLANS AND SPECIFICATIONS MAY RESULT IN SEVERE CIVIL AND CRIMINAL PENALTIES AND WILL BE PROSECUTED TO THE MAXIMUM EXTENT POSSIBLE UNDER THE LAW.

242001610

PROJECT INFORMATION:
BATH & BODY WORKS
THE GALLERIA II
SPACE NO. B3680
5085 WESTHEIMER RD.
HOUSTON, TX 77056

SCOPE: FULL REMODEL
DESIGN TYPE: EASTON-G
LSD&C PROJECT #: 00061216

PACKAGE: PKG 1+
GENERATION: 1415g
A/E PROJECT #: 130840

REVISIONS:
REQUIRED BY: DATE

ELITE CONSTRUCTION GROUP
LAKE JACKSON, TX
PHONE: 979-285-0712
NOTE: THESE PRINTS HAVE BEEN REDUCED BY 50 PERCENT. SCALE WILL BE 50 PERCENT OF WHAT IS NOTED ON PLANS

DATE ISSUED: 3/7/14
DESIGNED BY: GDK
DRAWN BY: RLA
CHECKED BY: GDK

STRUCTURAL SPECIFICATIONS AND NOTES

DRAWING NUMBER:
S01.1